


# Imaging Methods Applied to Mechanical Sound Carrier Preservation and Access

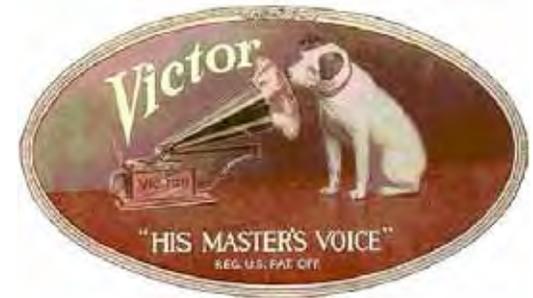

# Lawrence Berkeley National Lab

[www.lbl.gov](http://www.lbl.gov)

- Founded in 1931 by E.O. Lawrence
- Oldest of US National Labs
- Operated by the University of California for the US DoE
- 4000 Staff, 800 Students, 2000 Guests
- 14 Research Divisions including
  - Physics, Nuclear Science
  - Materials, Chemical Science
  - Life Sciences, Physical Bioscience
  - Energy and Environment, Earth
  - Computing
- Major user facilities-
  - Advanced Light Source
  - Nat. Center for Electron Microscopy
  - Nat. Energy Research Super Computer Center



# Collaboration and Support

[Lawrence Berkeley National Lab](#): CH, Vitaliy Fadeyev, Earl Cornell, Bob, Nordmeyer, Jian Jin, Edwin Widjonarko

[EIF Fribourg](#): Noe Lutz, Michel Yerly  
Mitch Golden

[Fantasy Studios](#): George Horn

[Library of Congress](#): Peter Alyea, Larry Appelbaum, Dianne van der Reyden, Nels Olsen

---

**Financial Support from the  
Library of Congress,  
National Endowment for the Humanities,  
The Mellon Foundation,  
National Archives  
The John Simon Guggenheim Memorial Foundation  
Department of Energy**

Corporate equipment donations, discounts, loan, and services from Aerotech, Archeophone, JH-Technology, Keyence, Microphotonics, National Instruments, Navitar, Newport, STIL, Uniforce, Veeco, Vidipax, Visicon

# Introduction

- We are developing methods of optically recovering mechanical sound recordings **without contact** to the medium
- Address concerns of the preservation, archival, and research communities:
  - Preservation: The reconstruction of delicate or damaged media
  - Access: Mass digitization of diverse media
- The approach evolved naturally out of methods of optical metrology, pattern recognition, and image processing at use in our lab.



# Non-Contact Digital Imaging

- Create high resolution digital map of entire surface
- Computer plays record with a virtual stylus
- Protects samples from further damage
- Repair existing damage through “touch-up”
- Offload aspects of restoration to automated software


A “smart” copying machine for records

# History

- 1859 Leon Scott invents *Phonograph* paper recorder
- 1877 Thomas Edison invents sound reproduction on tin foil *Phonograph*
- 1885 Bell and Tainter introduce wax cylinder
- 1887 Emile Berliner invents disc *Gramophone*
- 1925 Western Electric *Orthophonic* (electrical) system  
end of the “Acoustic Era”
- 1929 Edison production ends, lacquer transcription disc introduced
- 1947 Magnetic tape in production use, Ampex 200A
- 1948 33 1/3 rpm LP introduced
- 1958 Stereophonic LP on sale, uses 45/45 system
- 1963 Cassette magnetic tapes
- 1982 Compact Disc (CD)  
end of the “Analog Era”
- 2001 Apple *IPOD*



Discos fonográficos Pathe  
Caras y Caretas (7/7/1906)

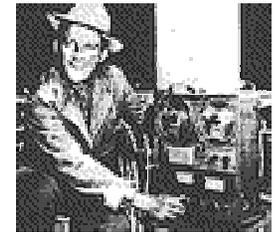

2006

AES SF 2006  
Carl Haber



# Diverse media

Shellac disc (“78”): main commercial media before vinyl (1950’s), scratches, wear, breakage



Wax and plastic cylinders: mold growth, wear, breakage



Lacquer, Al disc: instantaneous records pre-tape (~1948) exudation, flaking

Oct. 8, 2006



Plastic belts: dictation, monitoring (1940’s-60’s), folds, cracks, wear





Metal stampers



# Mechanical Recording Principles





Cylinder: groove varies in depth (hill and dale)

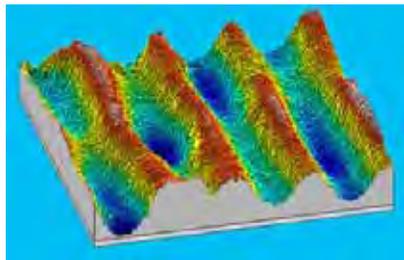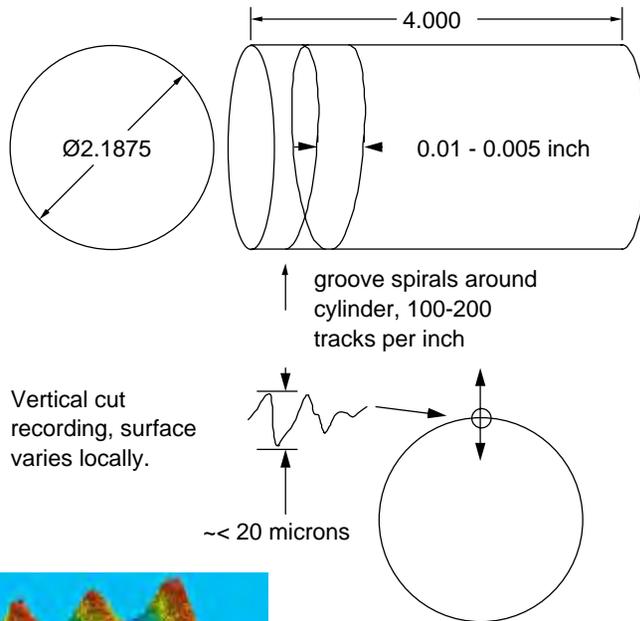



Disc: groove moves from side to side

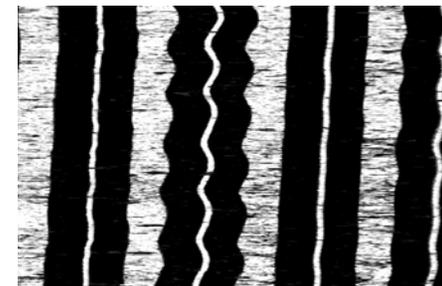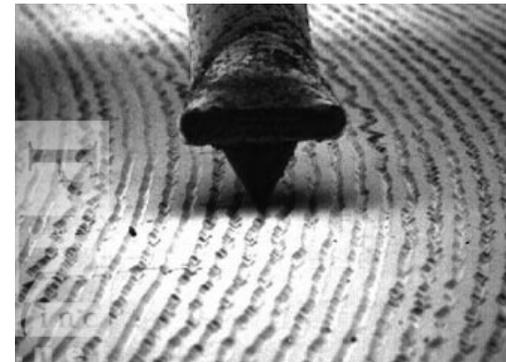

## Cylinder surface

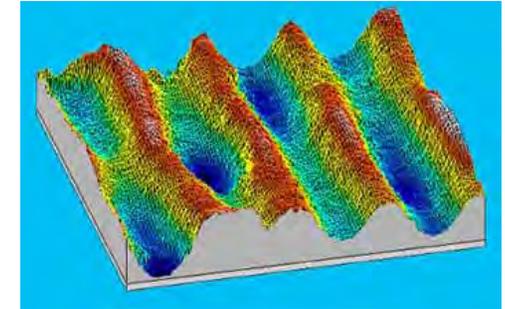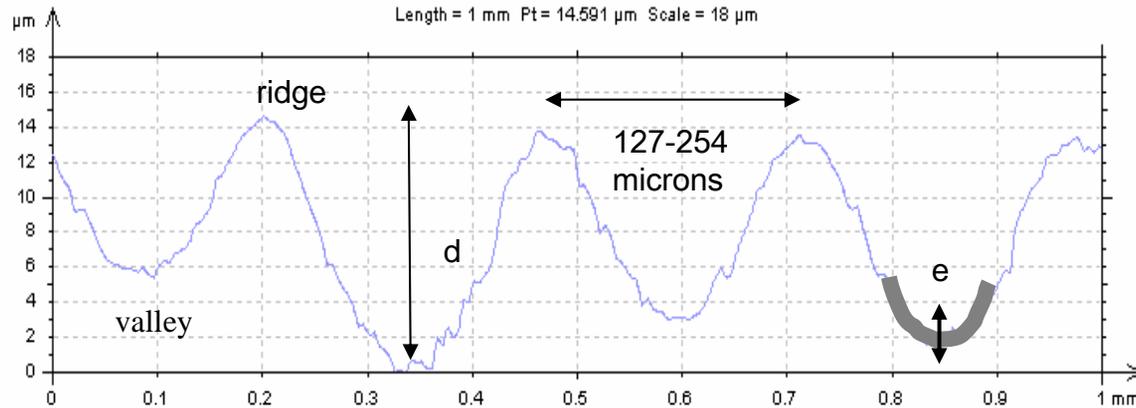


## Disc surface

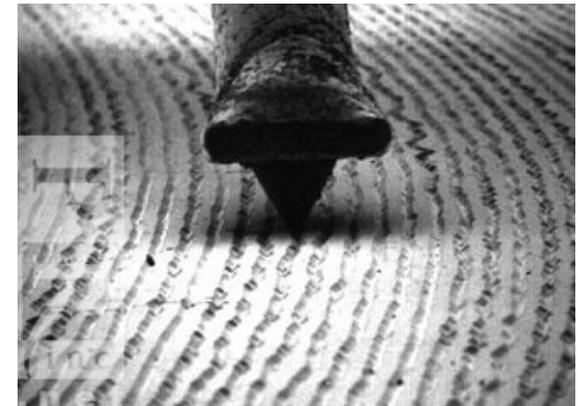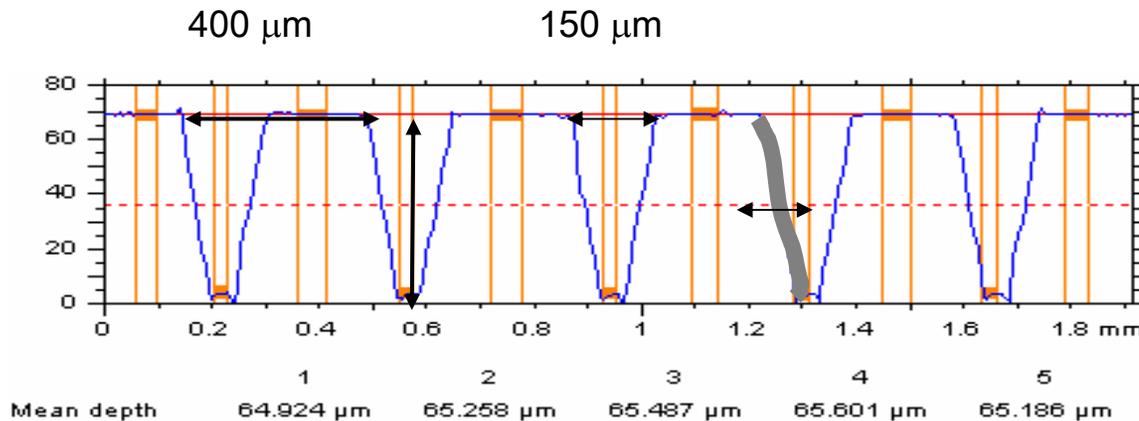


Debate during acoustic years between cylinder (constant surface speed) and disc (ease of manufacturing and storage) technologies.

<b>Parameter</b>	<b>78 rpm, 10 inch</b>	<b>Cylinder</b>
Cut	Lateral	Vertical
Area containing audio data	38600 mm <sup>2</sup>	16200 mm <sup>2</sup>
Total length of groove	152 meters	64-128 meters
Max groove amplitude (microns)	100 - 125	~10
Groove depth (microns)	80 fixed	+/- 10 varies
Groove displacement @noise level	1.6 - 0.16 microns	< 1 microns

Information is encoded in sub-micron scale structures which are >100 meters long

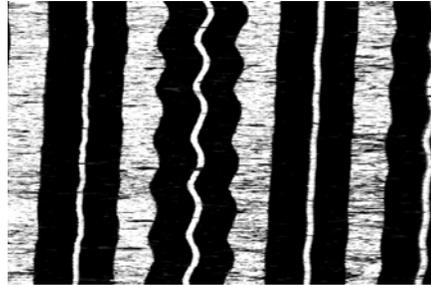

Micro-photograph of shellac disc:  
A two dimensional image “2D”  
can measure lateral grooves


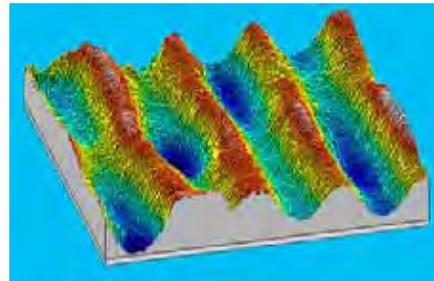


Surface profile of a wax cylinder:  
A three dimensional image “3D”  
is required for vertical cut grooves

# The Method

- Digitally **image** the surface
- Cover with sequential **views** or **grid**.
- Stitched together: **surface map**
- **Process image** to remove defects
- **Analyze shape** to **model** stylus motion.
- **Sample** at standard frequency
- **Convert** to digital sound format.
- Real time playback is **not required**

# 2D Imaging: Electronic Camera


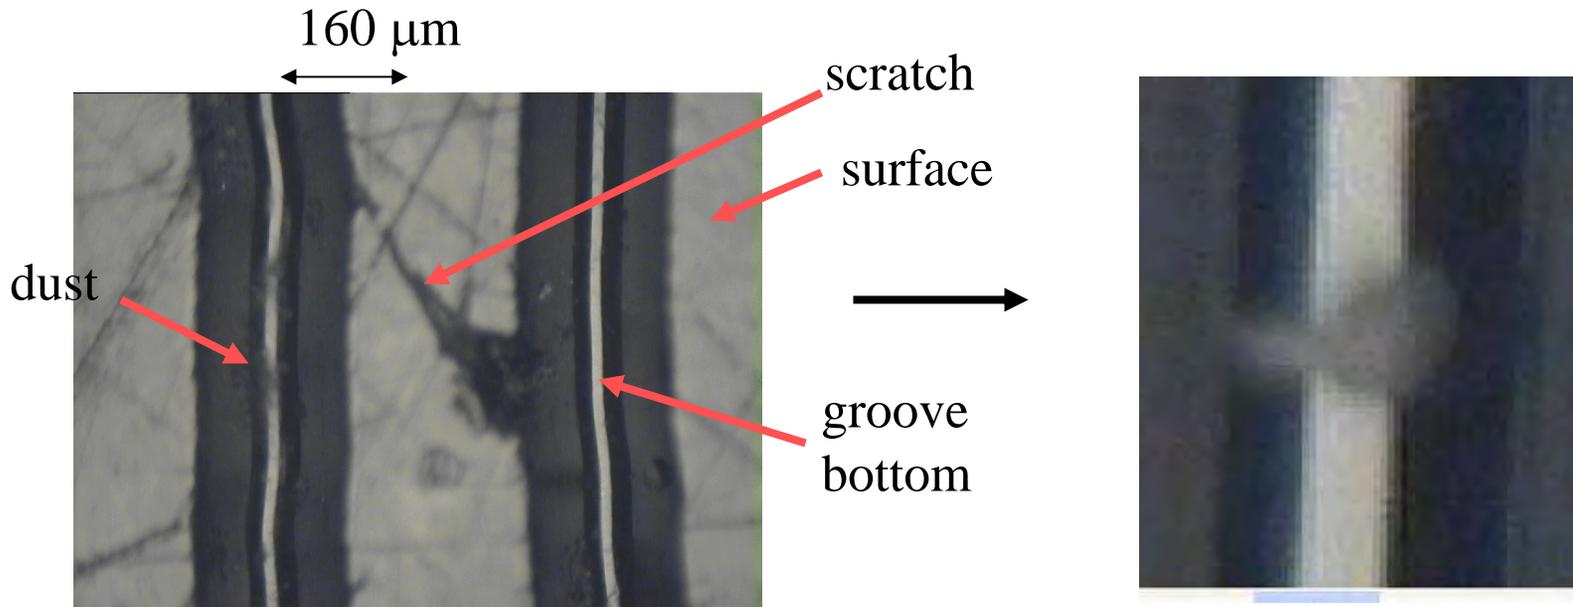


- Suitable for disc with lateral groove
- Require 1 pixel =  $\sim 1$  micron on the disc surface
- Coaxial illumination

# Speed and Data

- 2D scans for lateral discs
- High frame/line rate electronic cameras
- High intensity light sources
  - Fast camera: ~10 min for 78 rpm disc
- Data
  - 50 Mb / 1 s of raw images
  - 1.5 Mb / 1s processed
  - 88 Kb / 1s audio (44/16)




# Chromatic Aberration

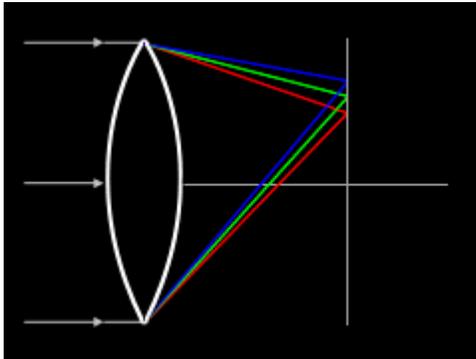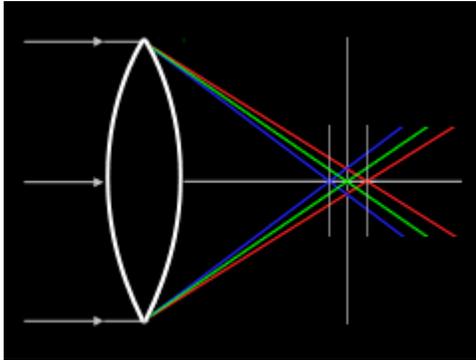

# 3D Imaging: Confocal Scanning Probe

Required for cylinder  
with vertical groove  
modulation.


Point by point scan  
0.01 degree = 96 KHz

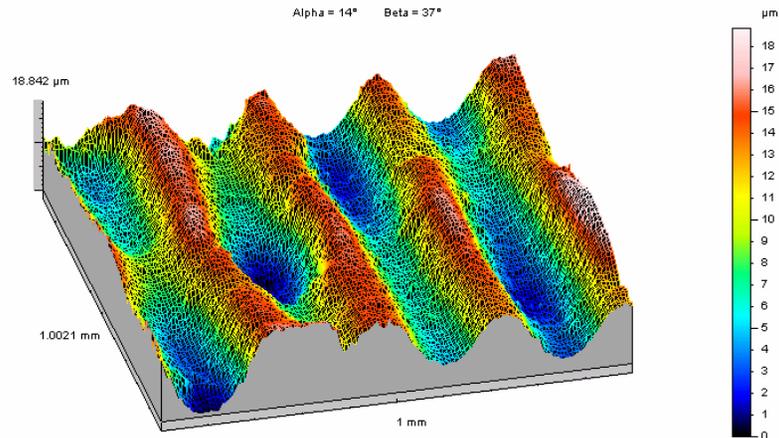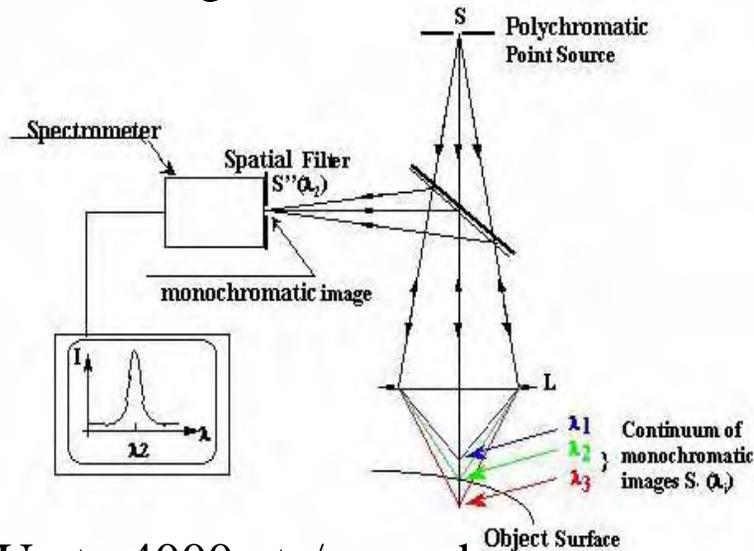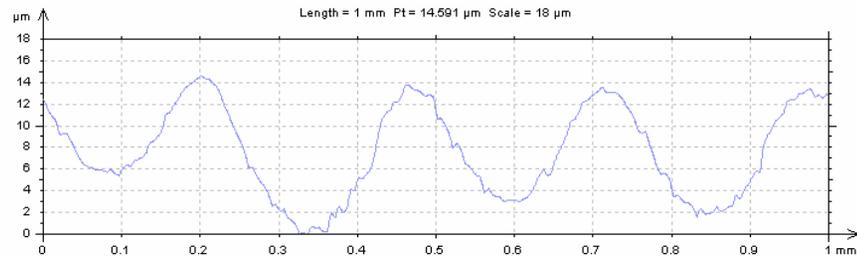

Surface of an Edison cylinder

Up to 4000 pts/second  
~ 5 micron point size

# Speed and Data

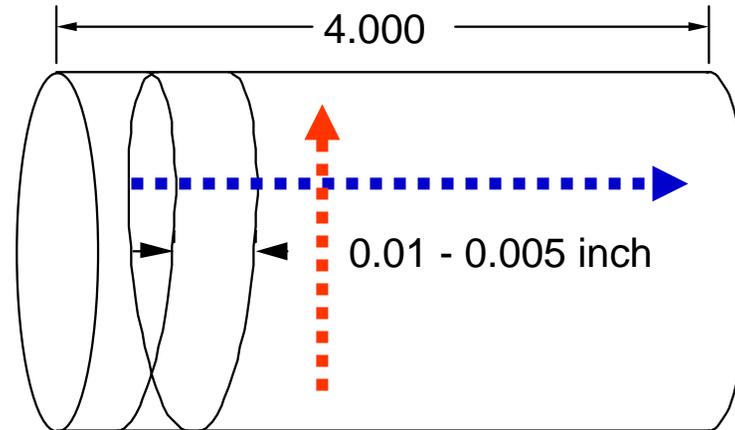


Fundamental drivers are: probe rate, grid (time x profile)


# Speed and Data

- 3D scans for vertical cylinders
  - Depends upon grid, probe rate, recording & surface characteristics
  - High sampling: 24-80 hours
  - Factors of 2-4 may be available soon
- 3D for deep groove lateral discs
  - Much slower probe rates are probably required

Vertical groove

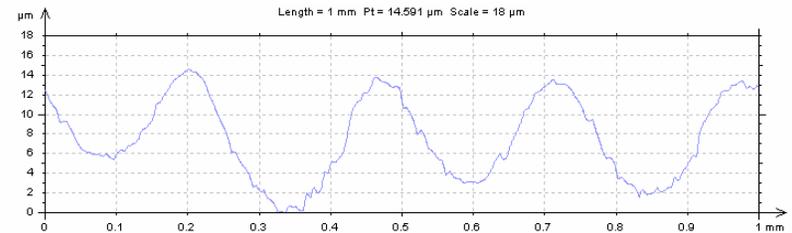





Lateral groove

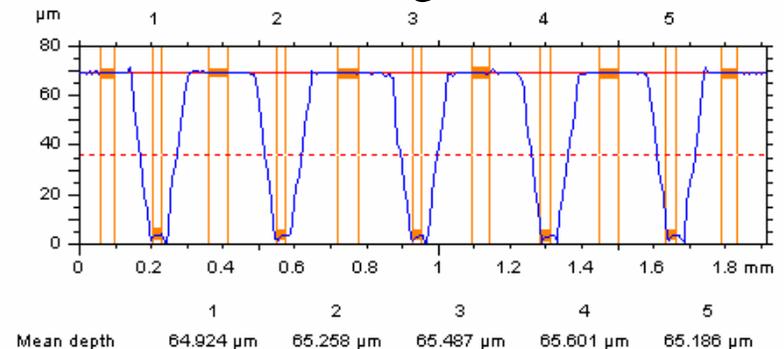


Key 3D issues are slope and depth

Analog waveform

Low-pass filter  
 $f_0 < f_{\text{sample}}/2$

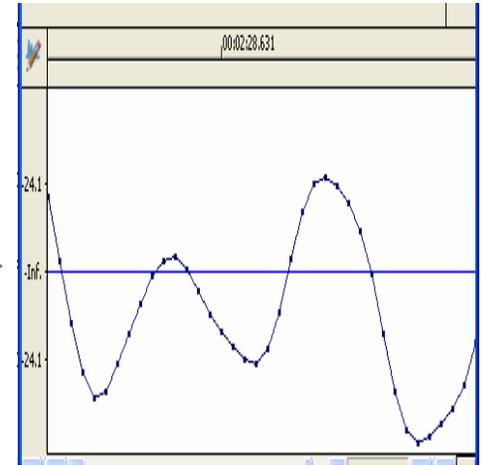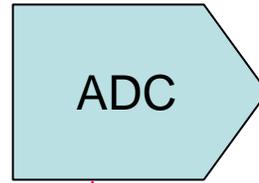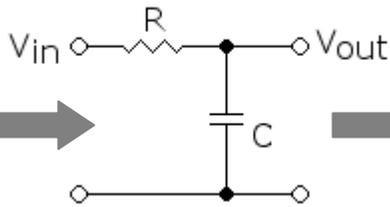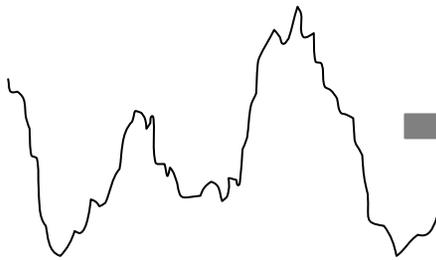

Commercial CD: 16 bits, 44.1 KHz  
Archive spec: 24 bits, 96 KHz

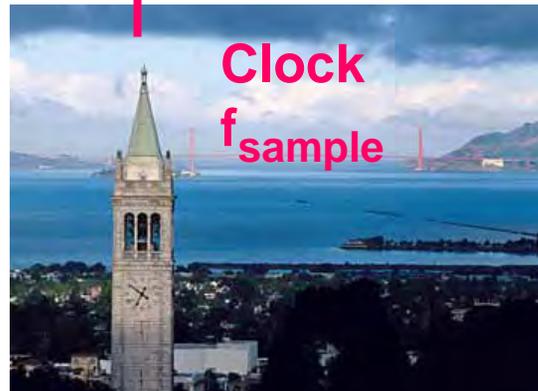


# Segmented image determines sampling

Natural segmentation  
by pixel size (2D), grid (3D)  
magnification, resolution


Easily time sample to 300 KHz

Amplitude sampling set by resolution  
~0.3 microns / 250 microns max (2D)  
~0.1 microns / 25 microns max (3D)  
Not 16 bits!

Time →


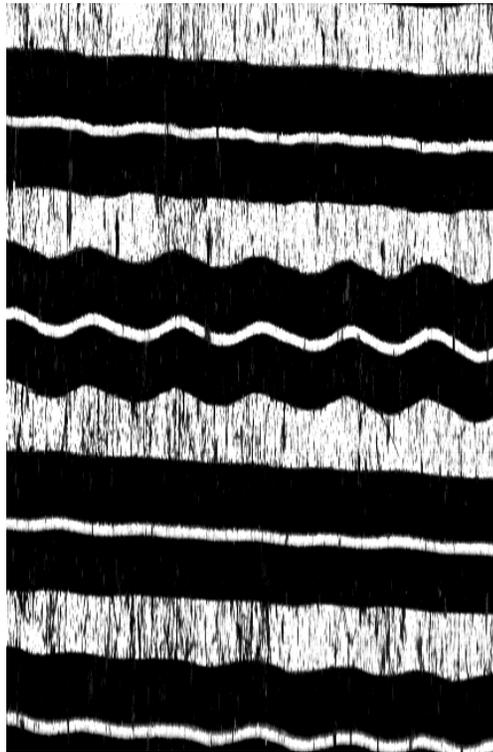


↕  
Amplitude

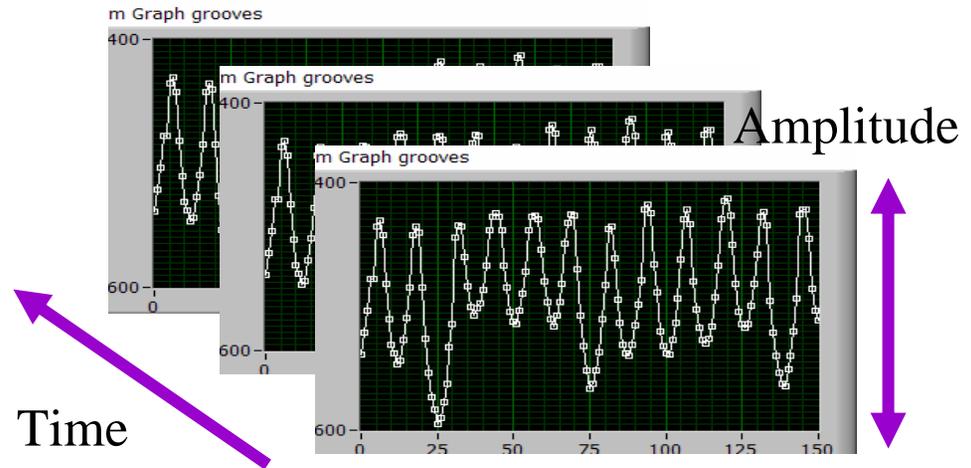




# Issue of Aliasing

- Sampling theorem
  1. Sample at  $2*f$  where  $f$  is highest frequency of interest
  2. Apply low pass filter above  $f$  to prevent aliased components appearing in data unless noise above  $f$  can be neglected.
- In optical approach sampling is done by pixelization of image.
  1. High sampling frequency
  2. Use of pixel size to achieve effective low pass filtering?

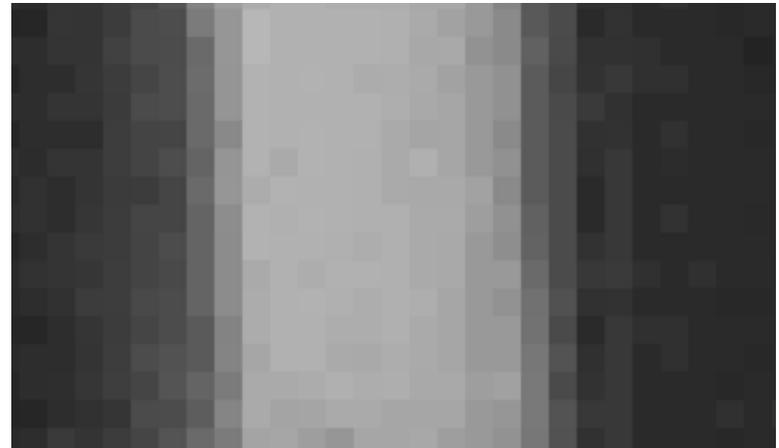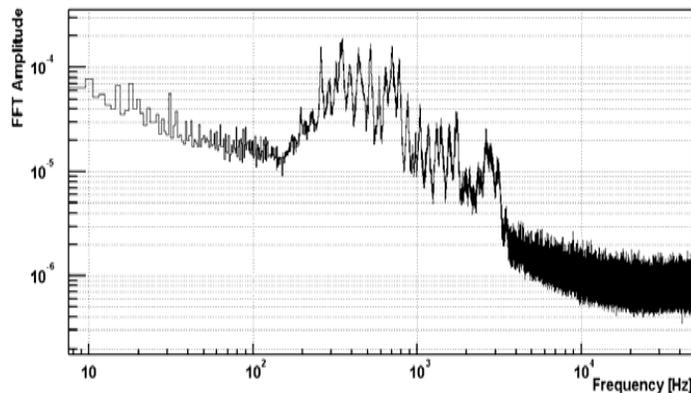


# Image Analysis

2D

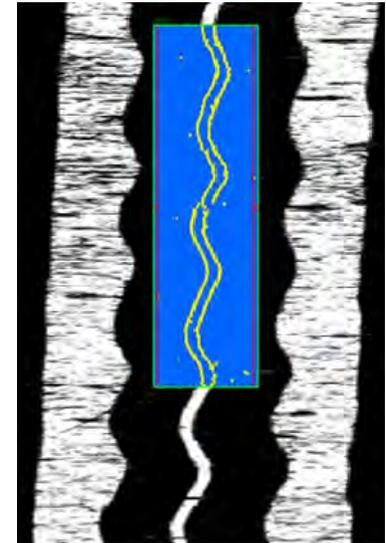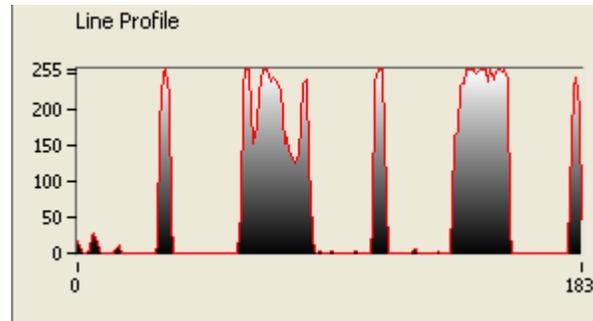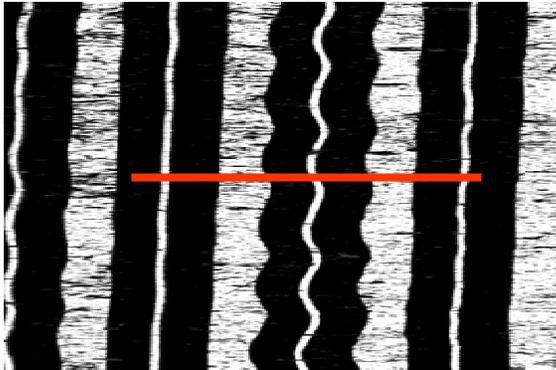

3D

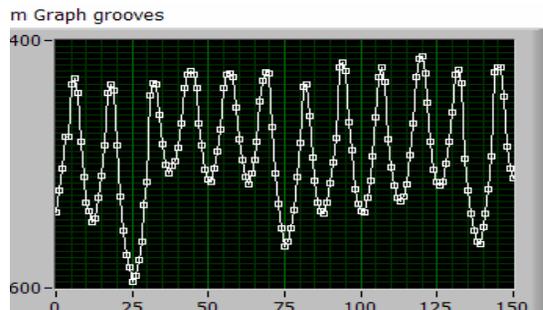


Fits to data provide estimate of depth

Groove geometry is unique and provides a powerful constraint on data


# What is the relationship between “groove” and sound?

Electro-magnetic case

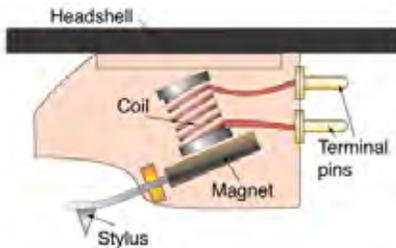


induction

Acoustic case

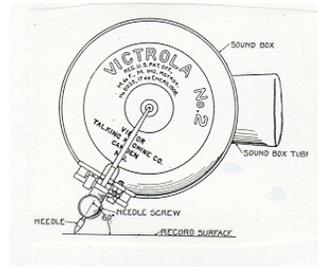

Diaphragm is over-damped to provide flat response

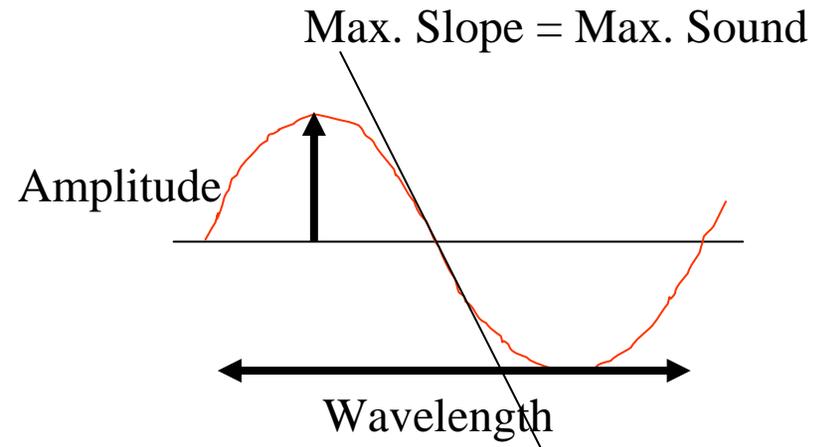


Sound = Stylus Velocity

$$A_p = \frac{v_p}{2\pi f}$$


(“constant velocity condition”)





# Acoustic Case

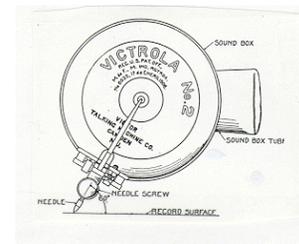

- Horn extends response (of small diaphragm) to lower frequencies
- Plane waves: pressure and velocity are proportional and in-phase
- Horn supports plane waves: true above a cut-off frequency for sufficiently large horn, depends also upon profile
- Diaphragm is a driven harmonic oscillator
- Want “flat” frequency response: requires overdamping
- Diaphragm velocity follows driving force (fails at high frequency where mass dominates (~5KHz))
- “Constant velocity” condition applies *approximately* but no deliberate equalization is possible.
- Response
  - Typical ~1 decade
  - best case 100 Hz-5KHz

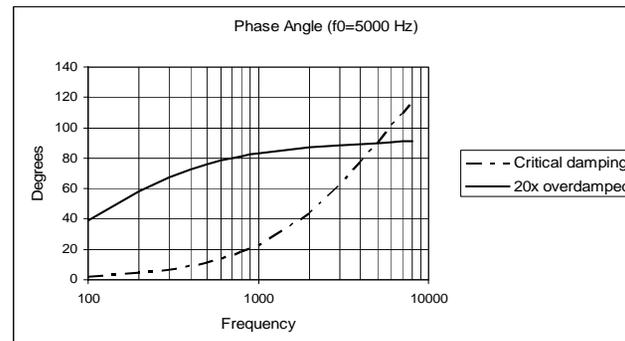

# Stylus Velocity and Filtering

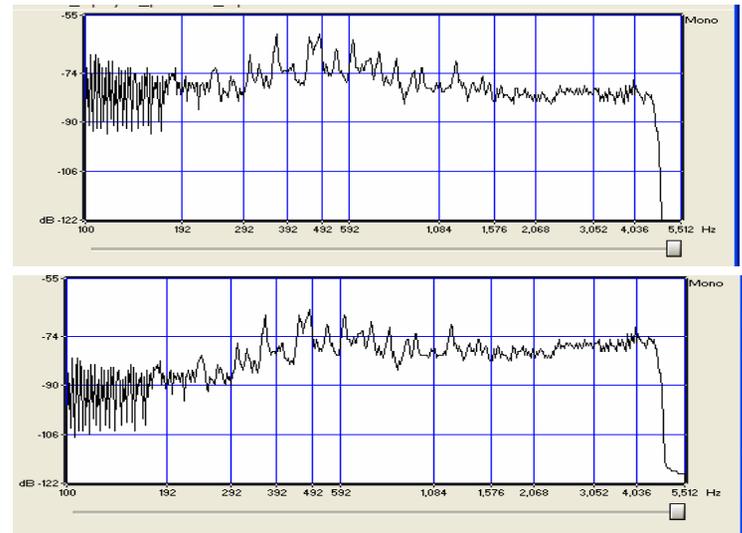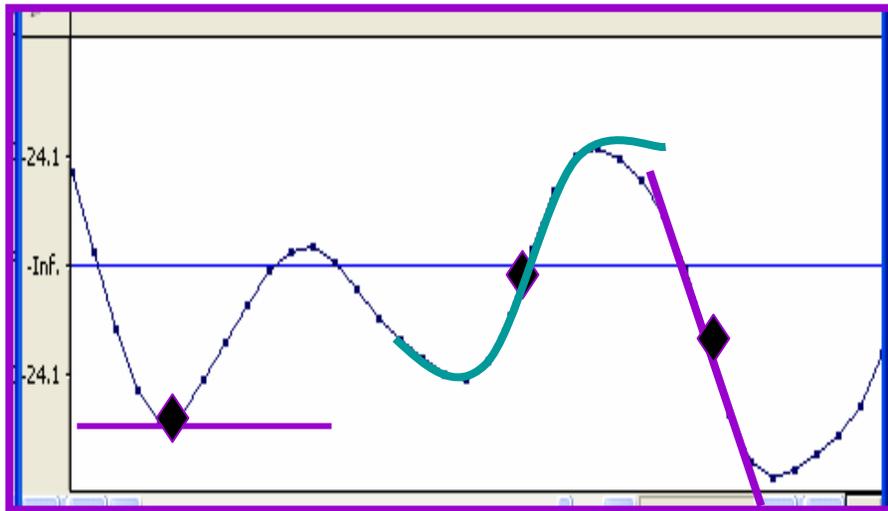

- **Finite Difference Method “FD”**
- Calculate slope at each point
- Point set imposes high frequency rolloff
- Slope (at n) =  $A(n-2) - A(n+2) / \text{interval}$
- **Local Fit Method “Pnn”**
- Fit polynomial to sets of points
- Complex high frequency effect

- **Frequency method (Fourier FOU)**
- Use all information in data up to maximum frequency
- Can apply explicit filters

# Numerical Differentiation and Filtering

$$\begin{aligned} \frac{d}{d(nT)} A_F(nT) &= \frac{d}{d(nT)} F_D^{-1}[C(k)] = \frac{1}{N} \sum_{k=0}^{N-1} \frac{d}{d(nT)} M(k) C(k) e^{-ik\Omega nT} \\ &= \frac{1}{N} \sum_{k=0}^{N-1} (-ik\Omega) M(k) C(k) e^{-ik\Omega nT} \end{aligned}$$

The filtering factor:

$$M = \left. \begin{array}{l} 0 \text{ for } f < 20\text{Hz} \\ 1 \text{ for } f \in [20\text{Hz}, 4.8\text{KHz}] \\ \left(1.0 - \frac{(f-4.8)}{0.4}\right) \text{ for } f \in [4.8\text{KHz}, 5.2\text{KHz}] \\ 0 \text{ for } f > 5.2 \text{ KHz} \end{array} \right\} \quad (23)$$


Perform the differentiation and filtering in a single processing step by:

- Doing FFT transform
- Applying  $(-i k \Omega) M(\kappa)$  factor
- Doing reverse FFT transform
- Or simpler point by point methods


# Comparison

- ✘ Data intensive
- ✘ Scanning speed (particularly 3D)
- ✘ Is fidelity sufficient?
- ✘ Powerful restoration methods for audio already available
  
- ♪ Non-contact
- ♪ Robust – wax, metal, shellac, acetates...
- ♪ Effects of damage and debris reduced by image processing
- ♪ Re-assemble broken media
- ♪ Resolve noise in the “spatial domain” where it originates.
- ♪ Use of groove geometry.
- ♪ Effects of skips are reduced.
- ♪ Distortions (wow, flutter, tracking errors, etc) absent or resolved as geometrical corrections
- ♪ Operator intervention during transcription is reduced, mass digitization.


Groove trace data, R[mm]-vs-phi[rad]

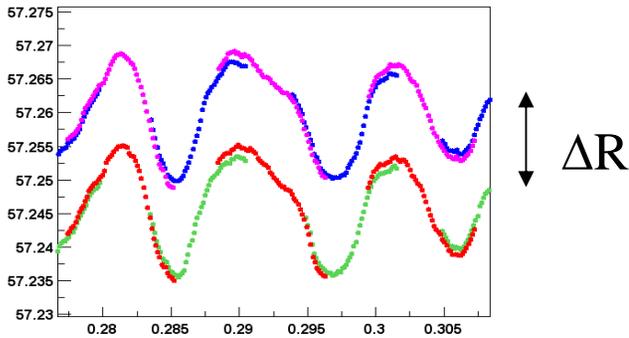

ΔR distribution

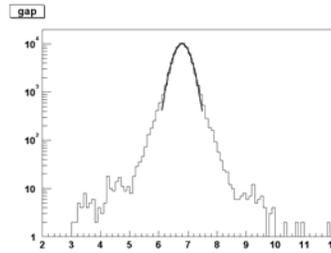


Width across groove bottom

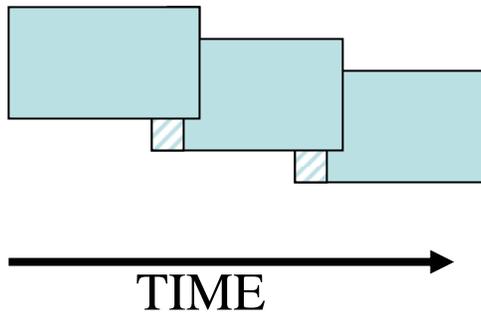

Measurement spacing along time axis ~ 66 KHz


Groove trace data, R[mm]-vs-phi[rad]

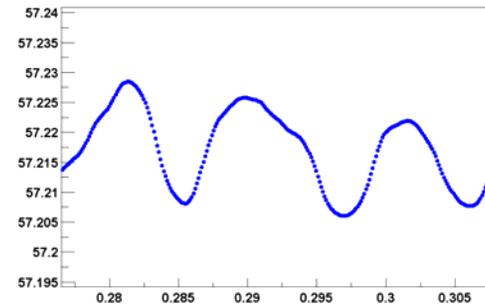

Align  
Average  
Filter using  $\Delta R < \text{cut}$

Measure slope at each point (stylus velocity)

Groove trace data, dR/dT[mm]-vs-time[sec]

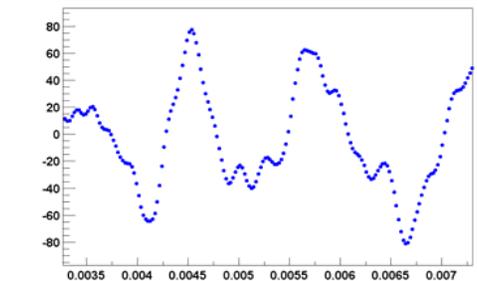

# Sound Comparison

“Goodnight Irene” by H. Ledbetter (Leadbelly) and J.Lomax, performed by The Weavers with Gordon Jenkins and His Orchestra ~1950




*optical* readout.



*mechanical (stylus)*



*CD re-mastered tape.*

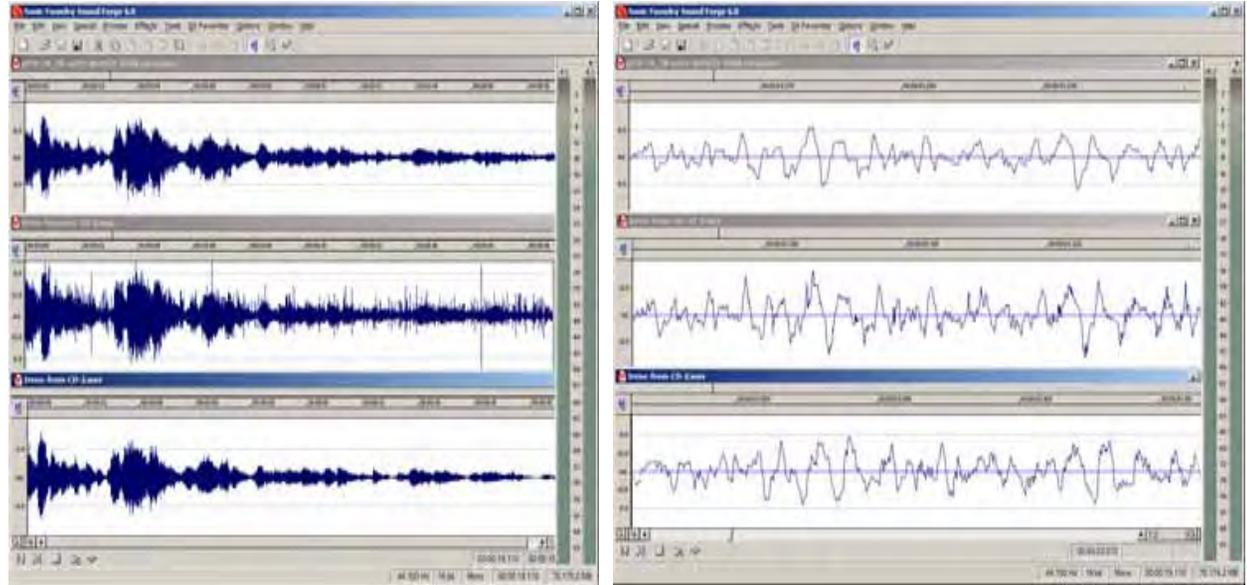

Bernard Hoffman/LIFE ©Time Inc.

Oct. 8, 2006



AES SF 2006  
Carl Haber





# Projects Underway

- Concept was tested 2002-2003 leading to interest and support from the Library of Congress and others.
- IRENE: a fast 2D optical scanner for disc records
  - Digital access to the most common media + special formats
  - Installed at the Library of Congress 8/2006
- 3D scans on “Edison” cylinders
  - Preservation and restoration of early and damaged recordings
  - Proposal to develop a 3D scanner for the Library of Congress
- 3D scans on plastic dictation belts
  - Feasibility study for preservation transfers of damaged media


# I.R.E.N.E.

## Image, Reconstruct, Erase Noise, Etc

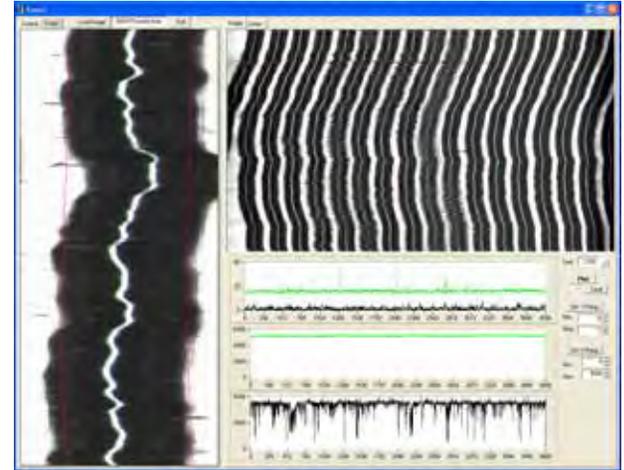
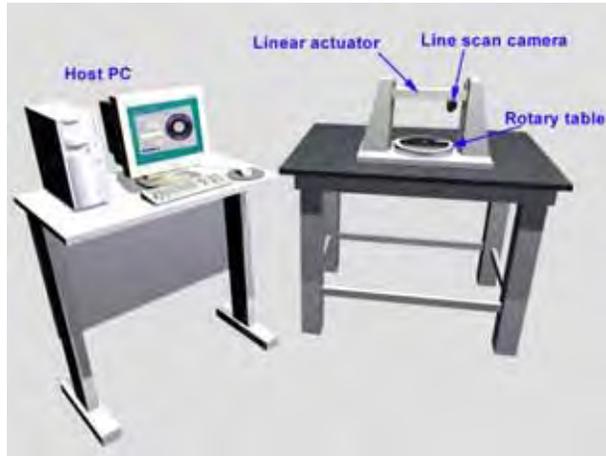




- Funded by NEH in 2005, installed at Library of Congress 8/2006
- ~1 year development and construction
- Experimental “production” machine and test-bed for future development
- Emphasize throughput and diversity (access), scan time ~10-15 minutes
- Provide statistical measures of media condition
- Currently under evaluation

# Line Scanning: disc is in motion

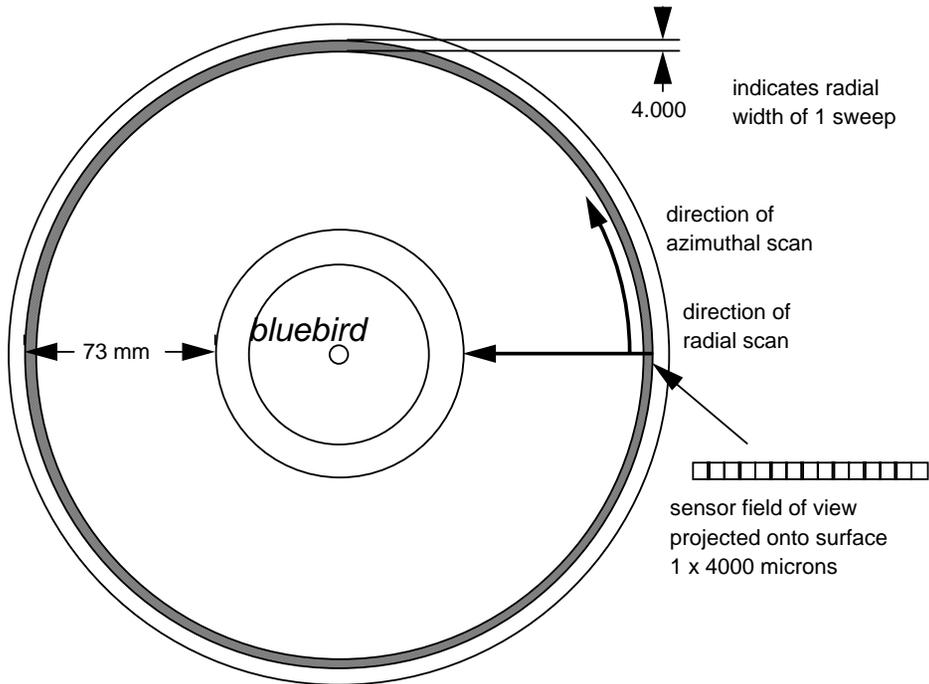


- 6000 pixels @ 15 K lines/s
- $7.6 \times 10^5$  lines/outer ring
  - 390 KHz max sampling
- Scans @ a few x real time
- Scan time decreases linearly with sampling!!!

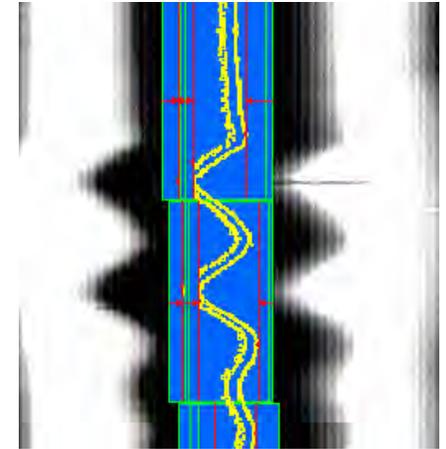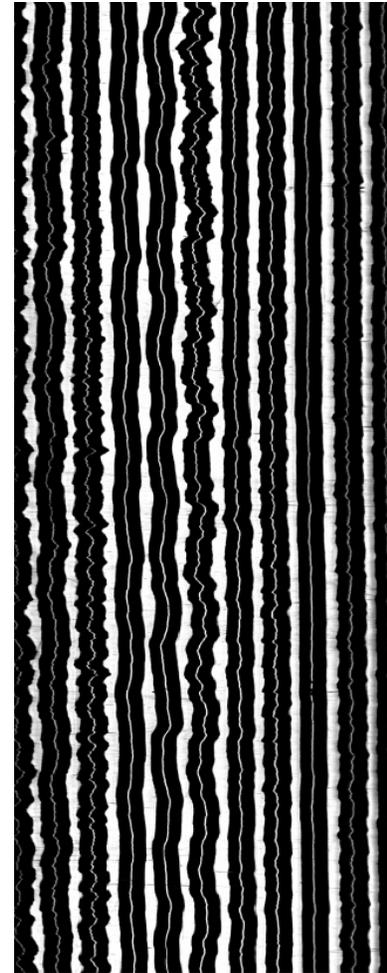

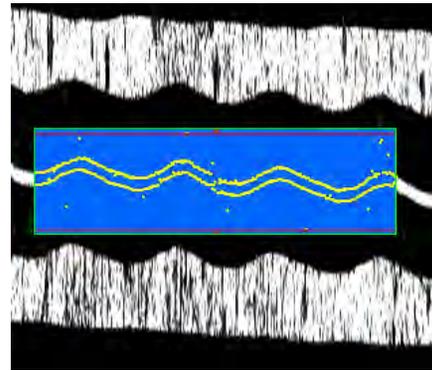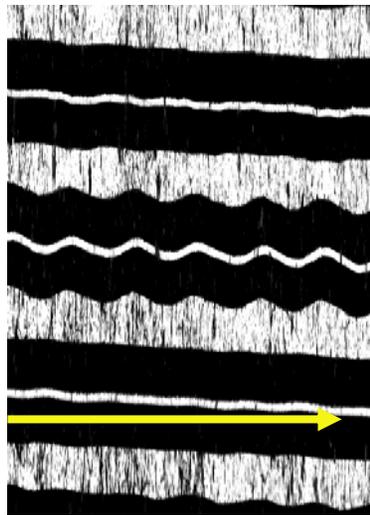



$\Delta R$  distribution

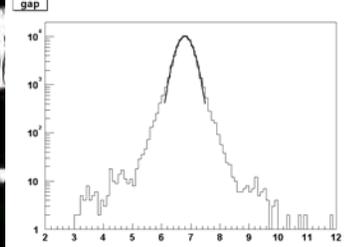




Width across groove bottom

Time  
Pixels = 104 KHz

Measure slope  
at each point  
(stylus velocity)

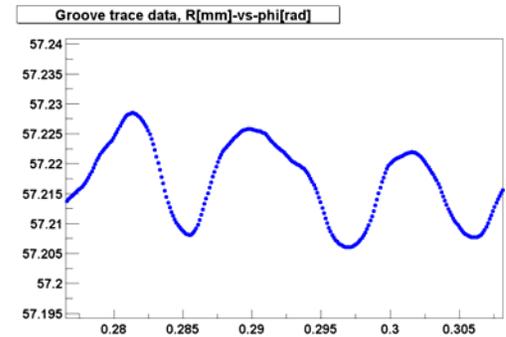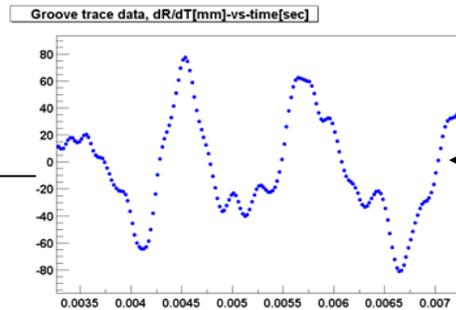

Average  
Filter using  $\Delta R < \text{cut}$

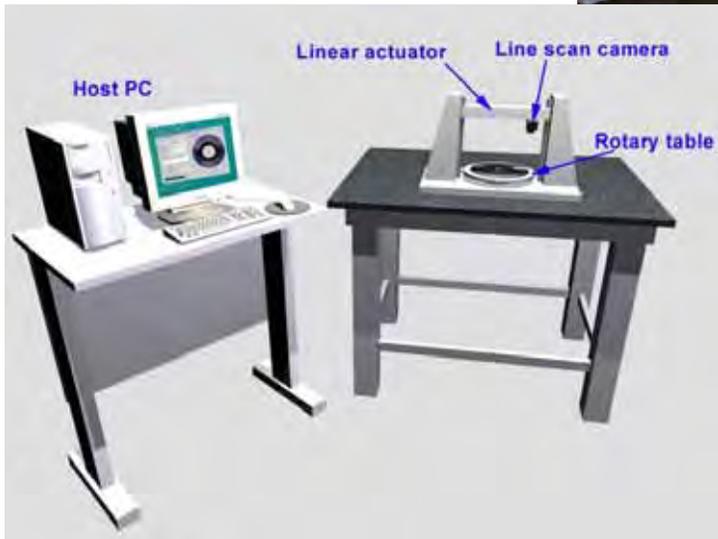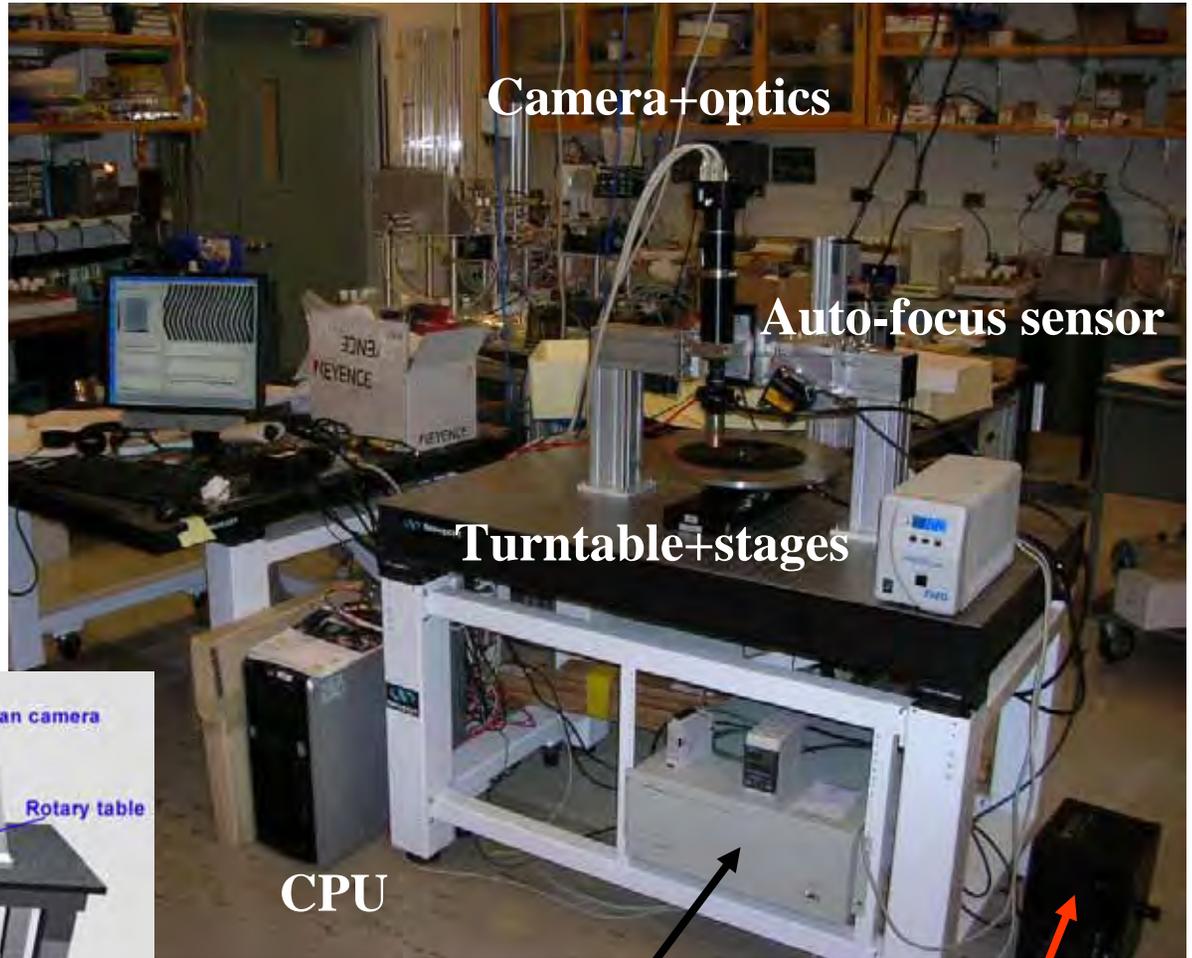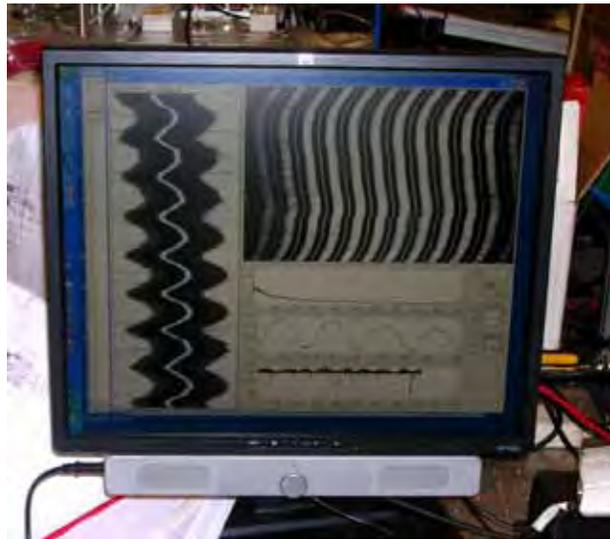

Camera+optics

Auto-focus sensor

Turntable+stages

CPU

Motion control



Light source



Oct. 8, 2006


AES SF 2006  
Carl Haber

34

# Control and Analysis Codes

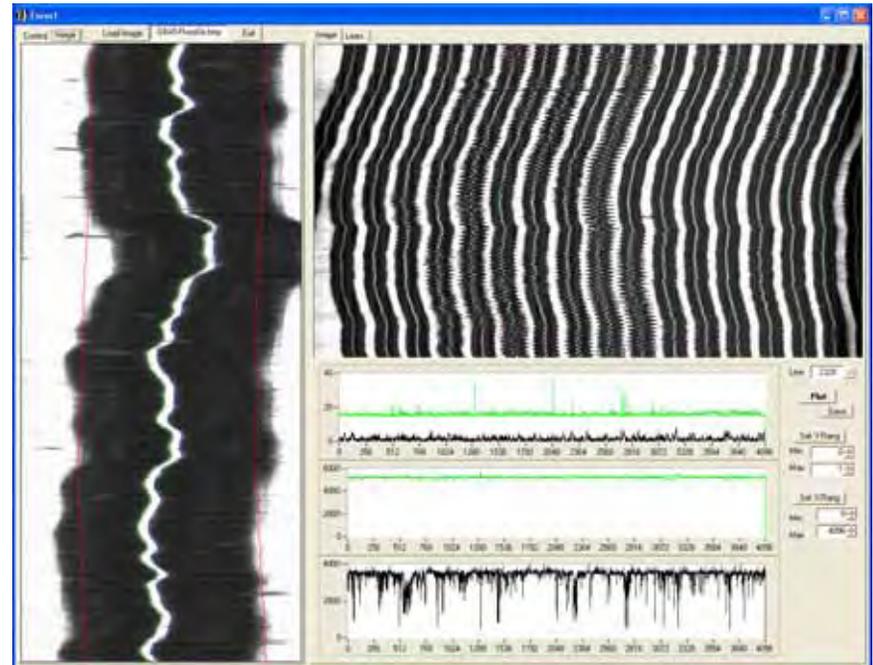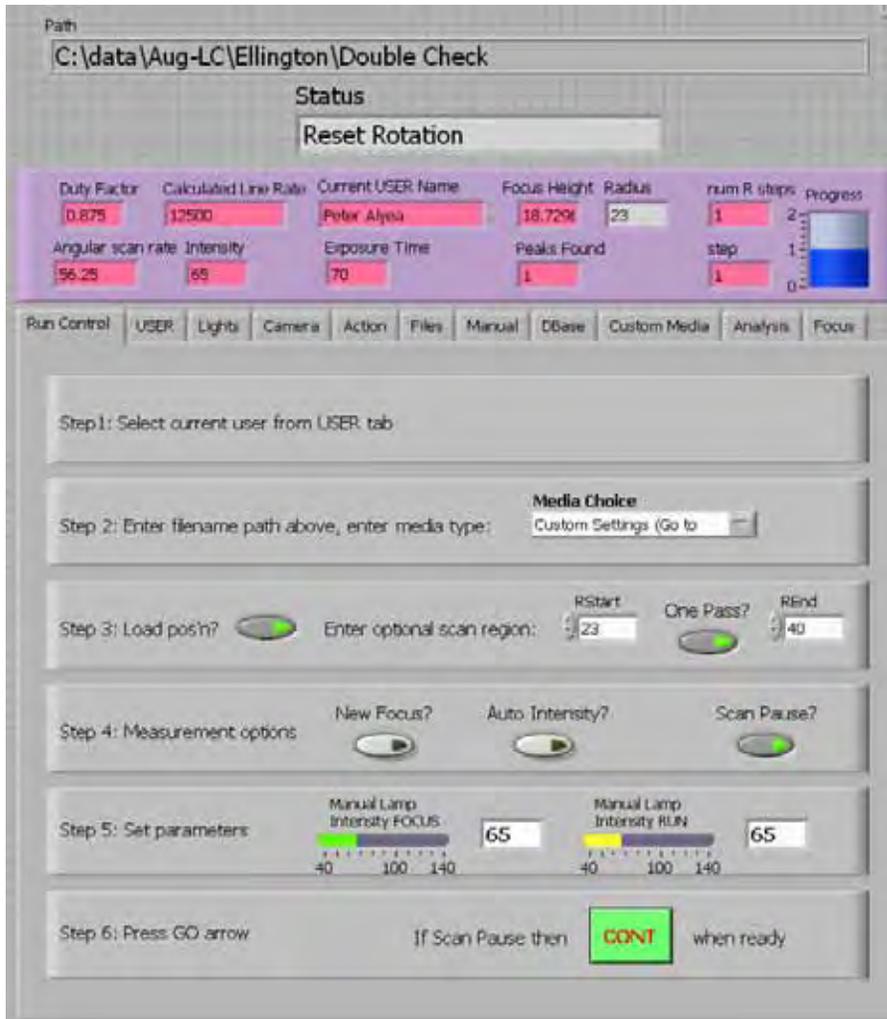


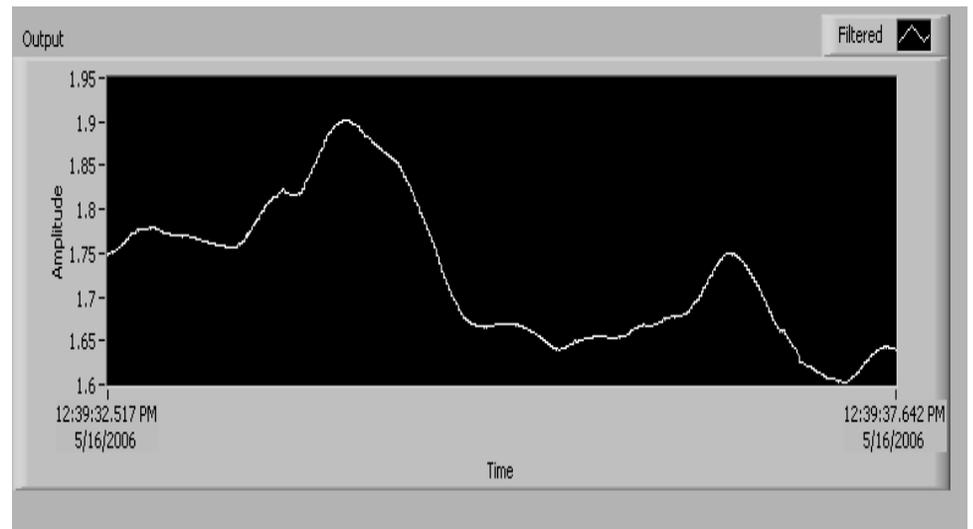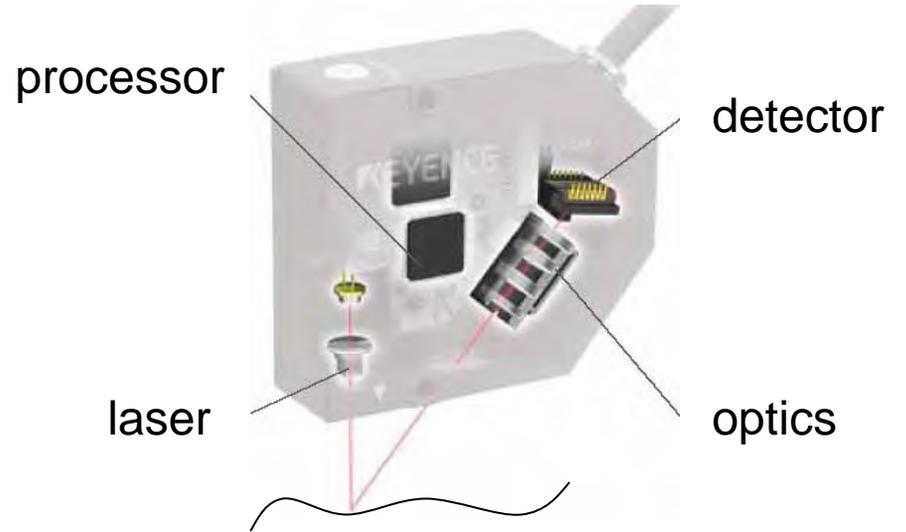

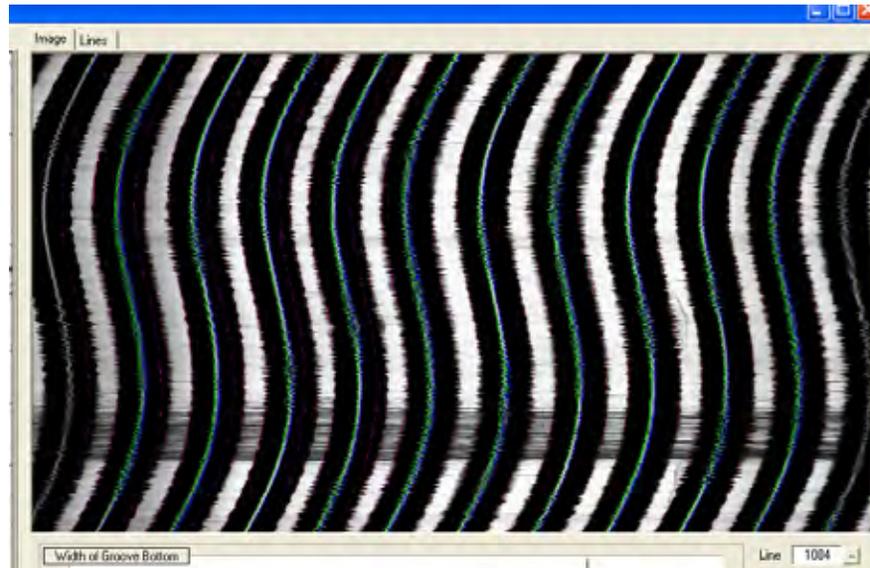


Label camera


Eccentricity control

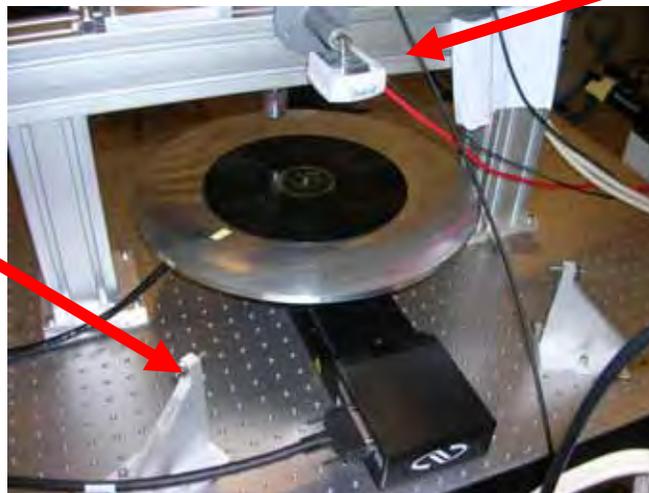


# Groove Images

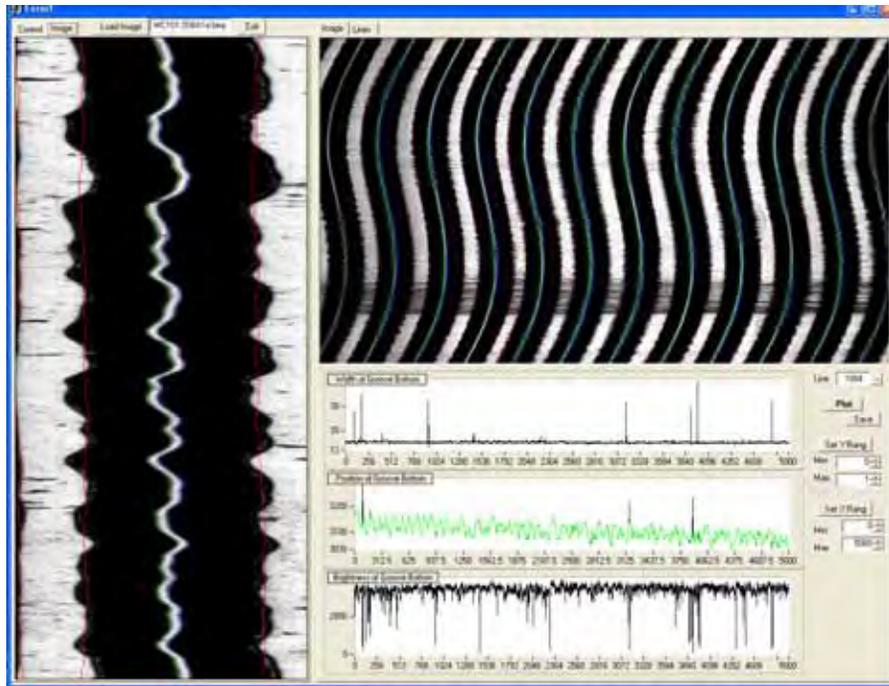


Lacquer disc

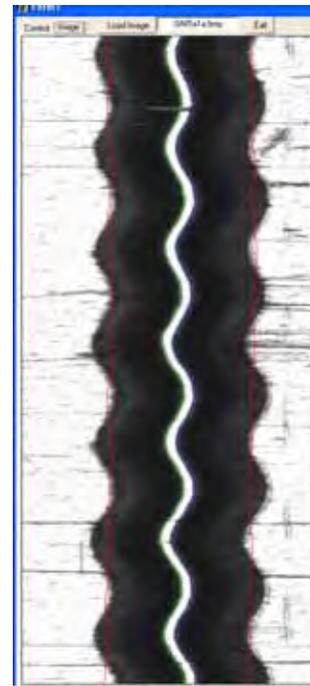

Shellac with moderate wear

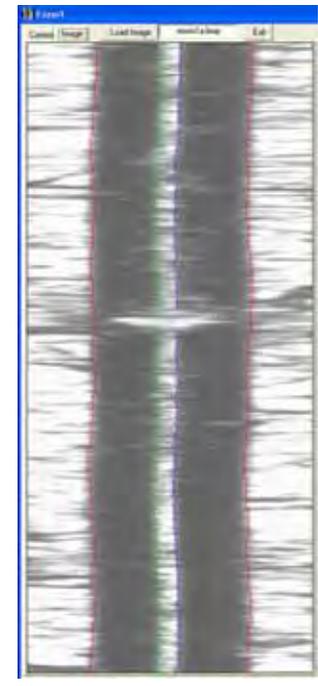

Poor quality shellac, acoustic recording

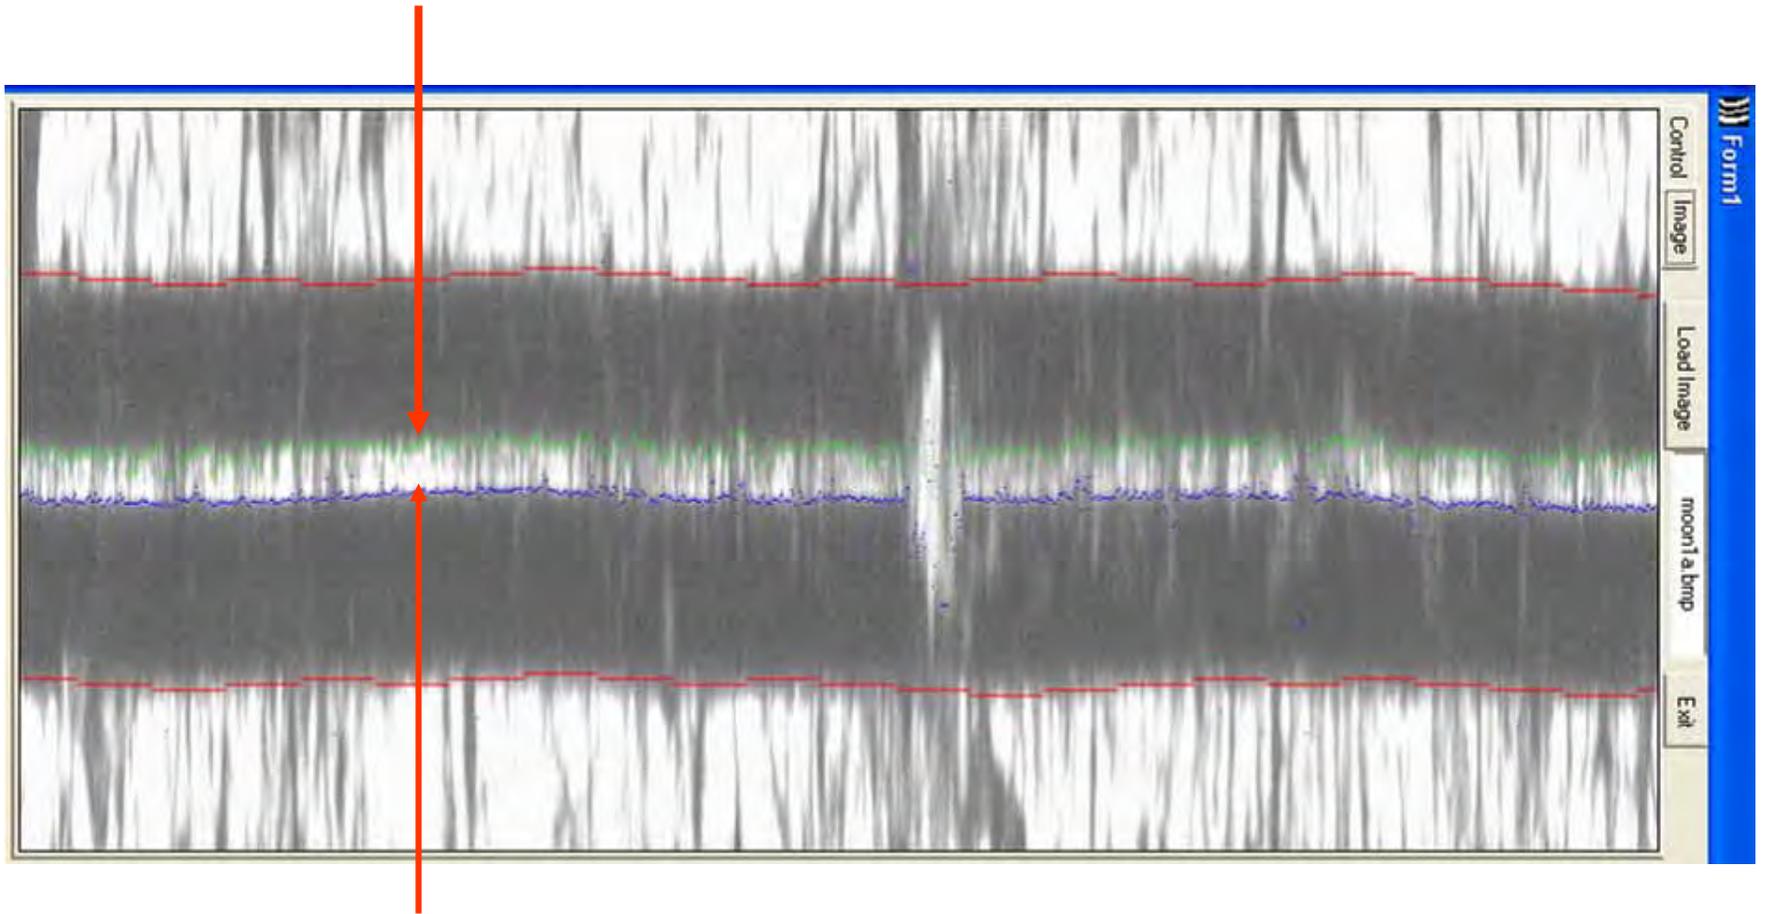

# Status

- Hardware configured and scanning
  - 15 minutes for a 3 minute disc but >50% is overhead
- Main control, logging, and analysis code runs
- Main issues have been illumination and field of view, uniformity
- Can process most scans and extract sound
  - Significant study of parameters still in process
  - Logging: focus, illumination, magnification, sampling,...
  - Analysis: image processing, defect recognition, interpolation, filtering, differentiation, models,...
  - All can effect sound quality, noise, frequency response in a variety of ways.

# Testing and Validation Phase

- 9-12 months in duration in the LC Recording Lab
- Led by Peter Alyea
- Machine to be tested on a significant sample of media
  - Quantitative comparisons with test (& other) records
  - Variety of media types and condition
  - Listening tests
  - Flat and historical EQ's
  - Study scan parameters and analysis/reconstruction options
- Results to be documented and disseminated
- Possibility of a follow-on stage
  - Upgrades to software and/or hardware
  - Expanded media study

# Media Condition Survey on LC Samples

**good 65%**



**poor 10%**



**good lacquer**




**fair 25%**



**fair**



**exudated lacquer**

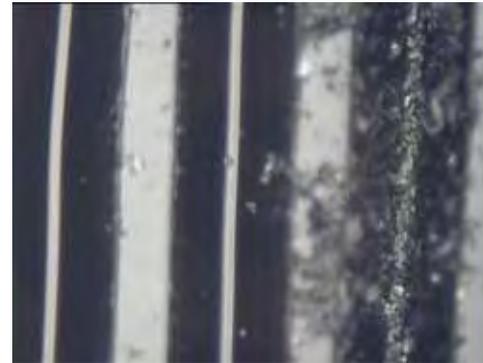

Multiple edges

Rough groove bottom


Oct. 8, 2006

AES SF 2006  
Carl Haber

# Test Scan Examples

- A variety of media types and condition
- These are early test scans to validate that the process runs from start-to-finish
- Should not be viewed as final results. Those will follow the validation study and will be formally presented to the community and documented as agreed.

# The Star Spangled Banner: Kate Smith

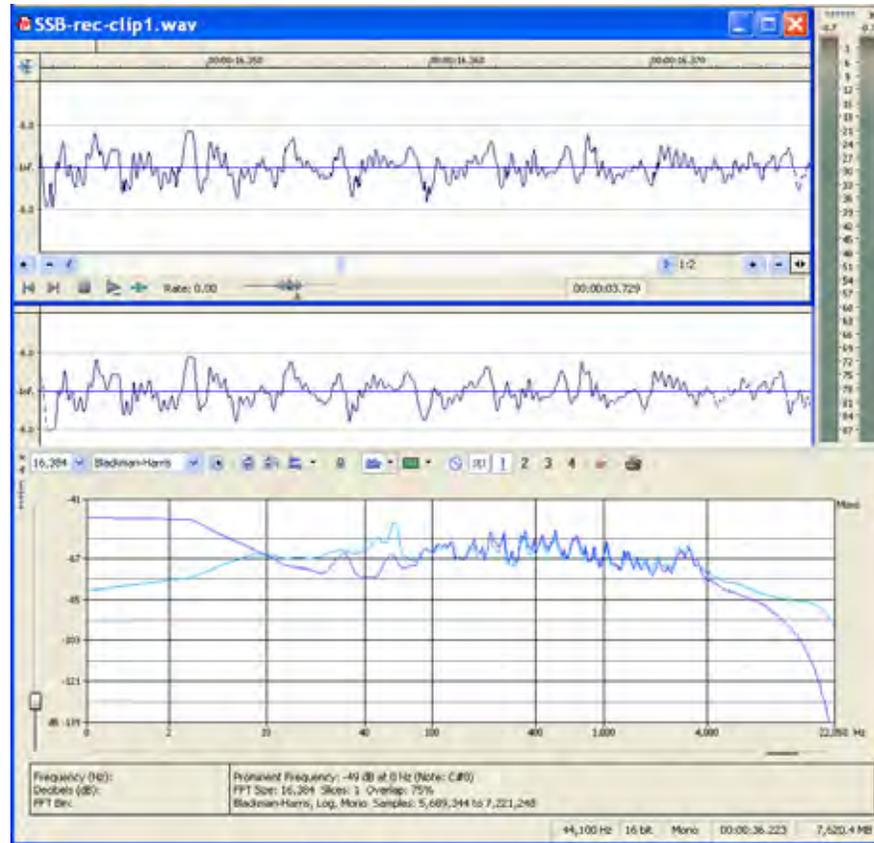

stylus



IRENE


78 rpm shellac disc with moderate wear,  
RIAA curve applied

Oct. 8, 2006

AES SF 2006  
Carl Haber

44

# Goodnight Irene: Weavers 1950

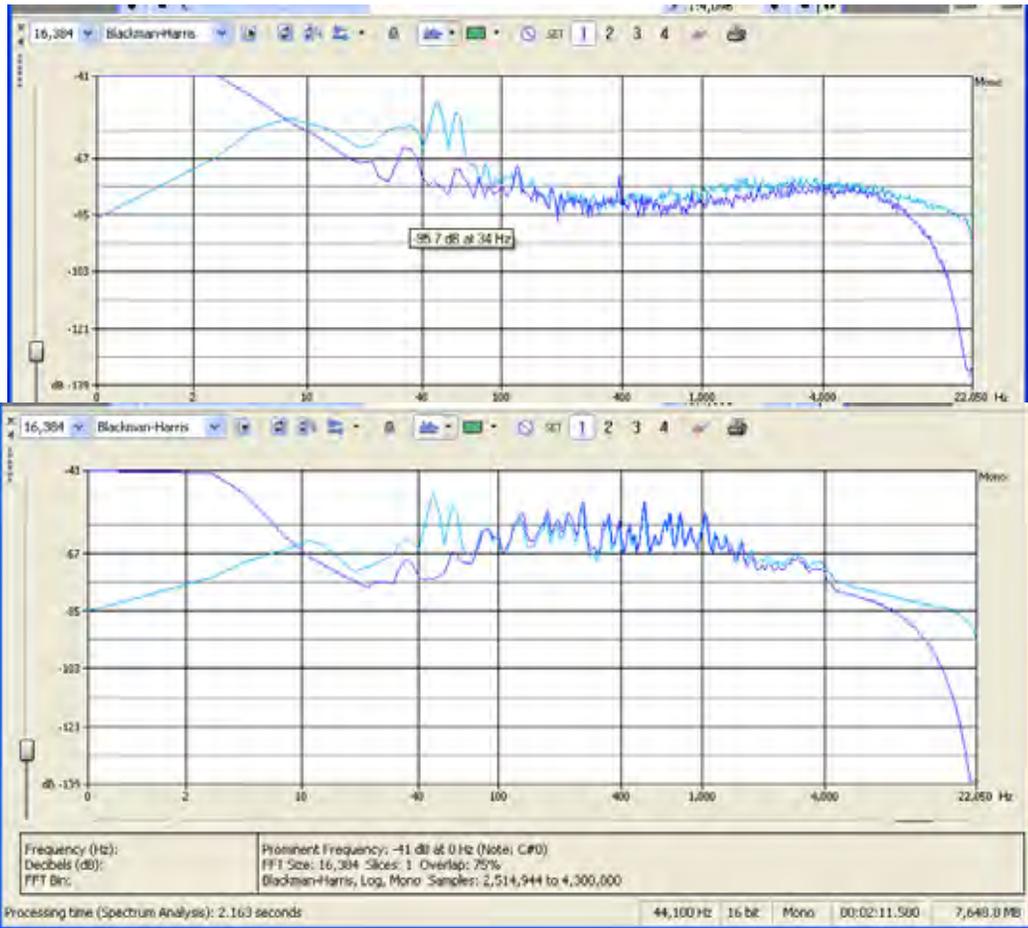

Noise spectra



stylus



IRENE




# Studio Test 1947

## Mutt Carey and his New Yorkers: Shim-Me-Sha-Wabble



Lacquer disc, RIAA EQ

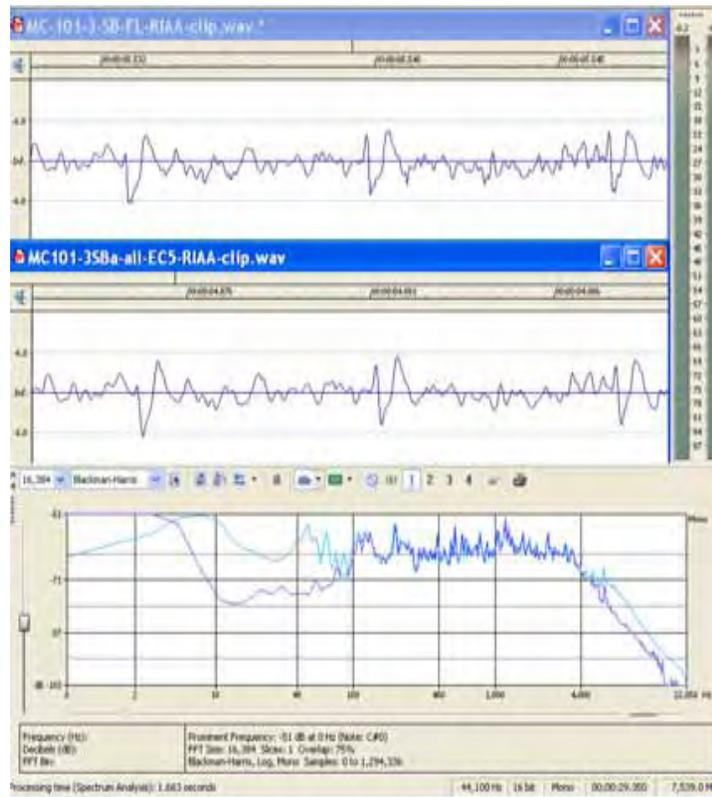

 stylus

 IRENE

# Acoustic Recordings, Worn

## Dirty and worn

When You and I Were Young, Maggie

Composer: Johnson and Butterfield

Performed by Charles Harrison

Victor 17474-B



Stylus version



IRENE test scan



## Poor image quality

In the Evening by the Moonlight

Performed by Columbia Stellar

Quartette, Columbia A2683, 1918



Stylus version




IRENE test scan



Classified POOR in initial  
media survey

# Memovox Disc

- Developed fixtures to temporarily flatten these
- Image features are less distinct than on shellac and lacquer discs
- Analysis still basic...

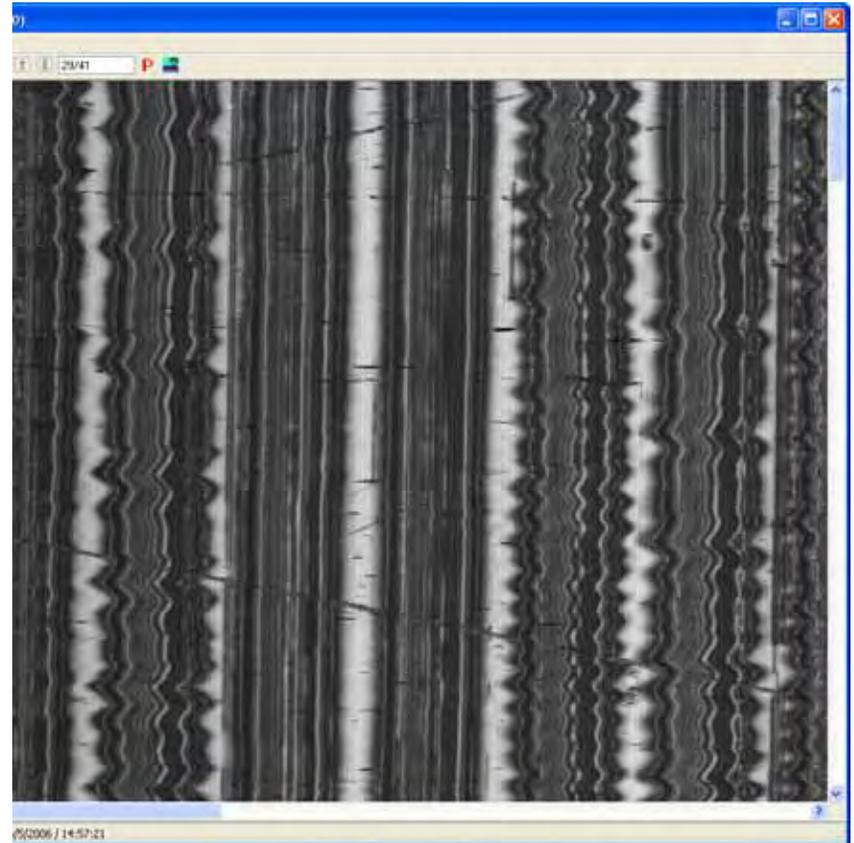

# Interesting Lacquer Discs



78 rpm lacquer on glass  
Label: Howard Hughes,  
Collier Award 1939



78 rpm acetate,  
Theos Bernard,  
interview, 1929

**U. S. Tibetan Scholar Is Missing  
In Punjab After a Tribal Attack**

*Theos Bernard, Author, Feared  
Dead by Wife Who Reports  
Incident in New Delhi*

NEW DELHI, Oct. 30 (AP)—An American student of Tibetan culture has been missing since mid-September on a trip to a Tibetan monastery and may be dead, his wife said today.

He is Theos Bernard, 40, of New York and Santa Barbara, Calif., son of G. A. Bernard of Northridge, Calif.

Interviewed here, Mrs. Bernard said shepherds had told of seeing Lashui tribesmen attack her husband's party and kill his Moslem servants. That was in the Himalaya Mountains of northern India, she said, between Sept. 22 and Sept. 28.

Mrs. Bernard said she had learned that her husband then was short of food and she feared that he might also have lost his heavy clothing to the raiders.

Mr. Bernard set out Aug. 20 from the out-of-the-way Kulu Valley of the northern Punjab 800 miles after that, she said. Hindu-Moslem rioting broke out in the valley and she herself had to flee 125 miles on foot, southward to Simla. She passed through New Delhi today on her way to Calcutta, where she said she would await word of her husband.

**Theos Bernard**

AR  
ON  
Lac  
Ch  
Ma  
By  
26.  
army  
pend  
able  
copy  
of I  
dara.  
He  
1906  
mill  
1909  
now  
Pina  
0004  
21  
1906  
near  
offic  
1907  
27th  
man  
1908  
not  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025












# Cylinder Scans



- Cylinder History
  - 1877 Aluminum foil
  - 1885 Soft wax for original recordings and dictation
  - 1902 Hard wax molded, commercial
  - 1908 Cellulose molded, commercial “Amberols”



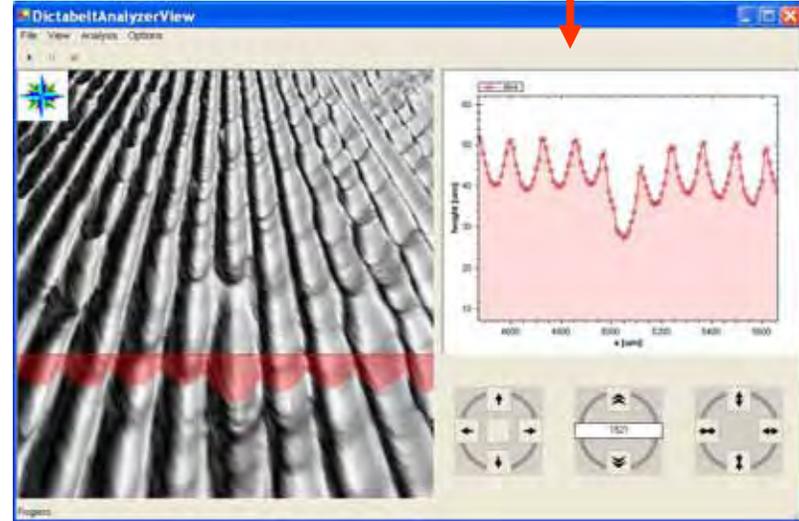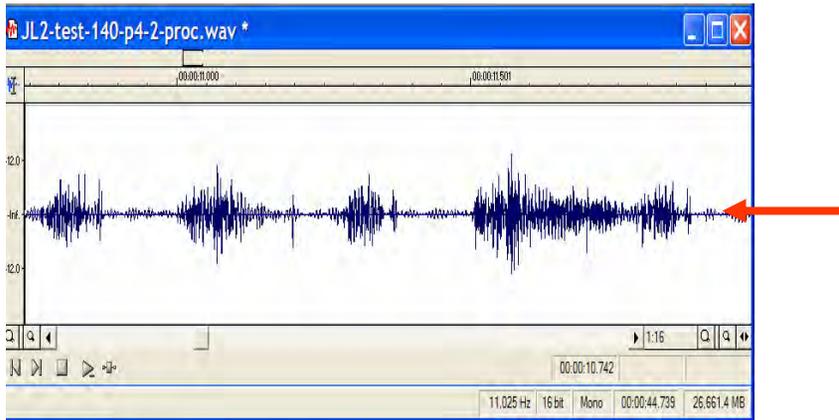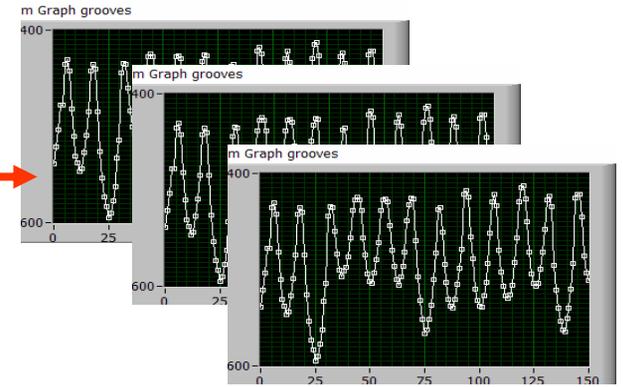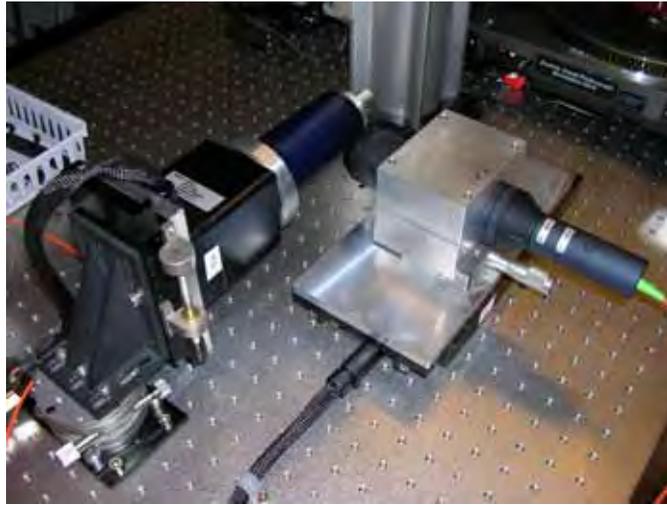

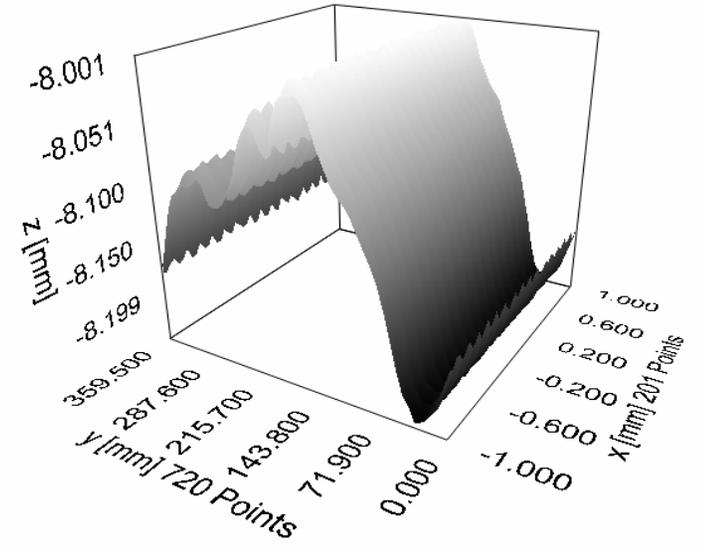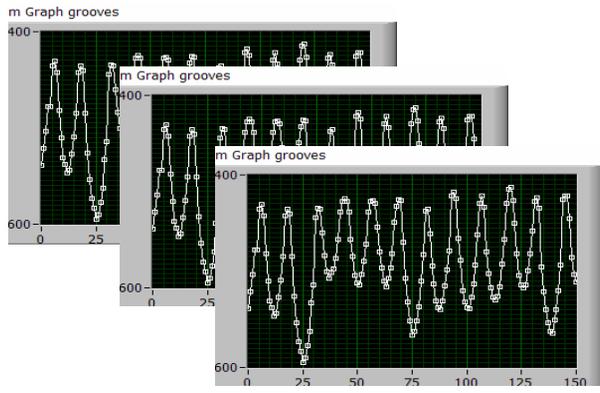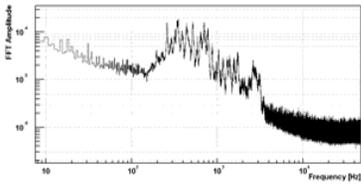



Sample at 96KHz to minimize effect of aliasing

Sequential axial scans



Subtract valleys from ridges to correct for overall shape

Overall cylinder shape due to off-center, deformation, heard as low freq rumble

(Ridges provide (approx), geometrical reference)

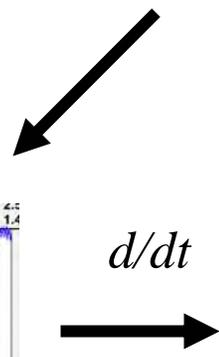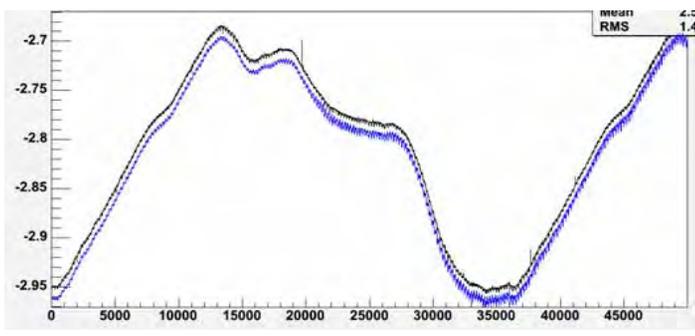

$d/dt$

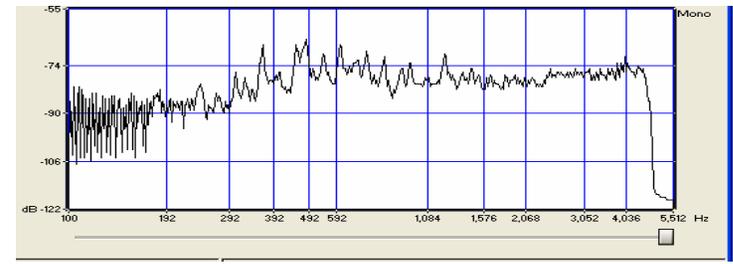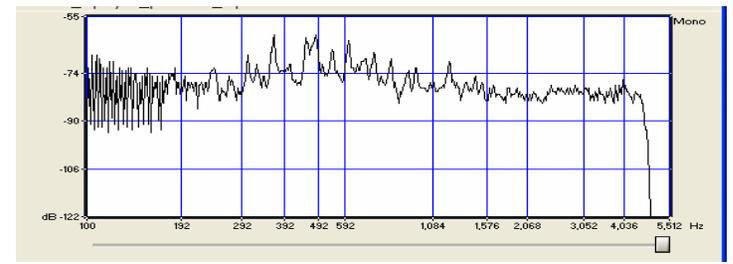





# Sound Comparison

- The Holy City, composed by Stephen Adams,  
The Edison and Skedden Mixed Quartet, Amberol 1601



- Stylus
- Optical
- Optical + filter + EQ

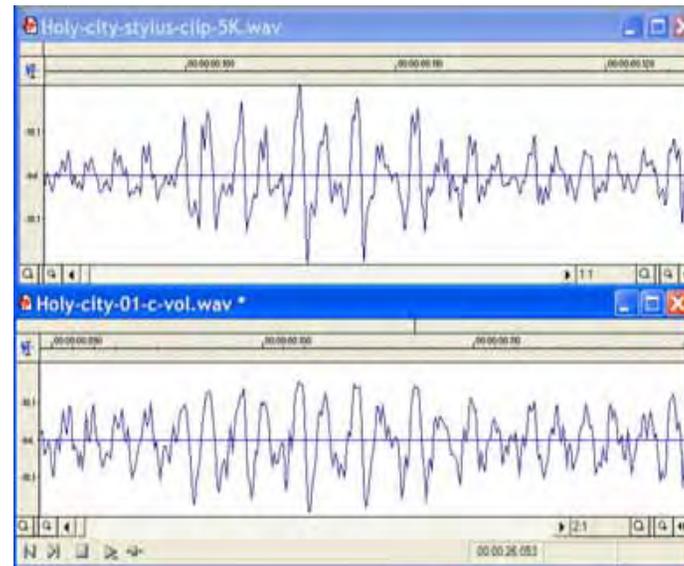

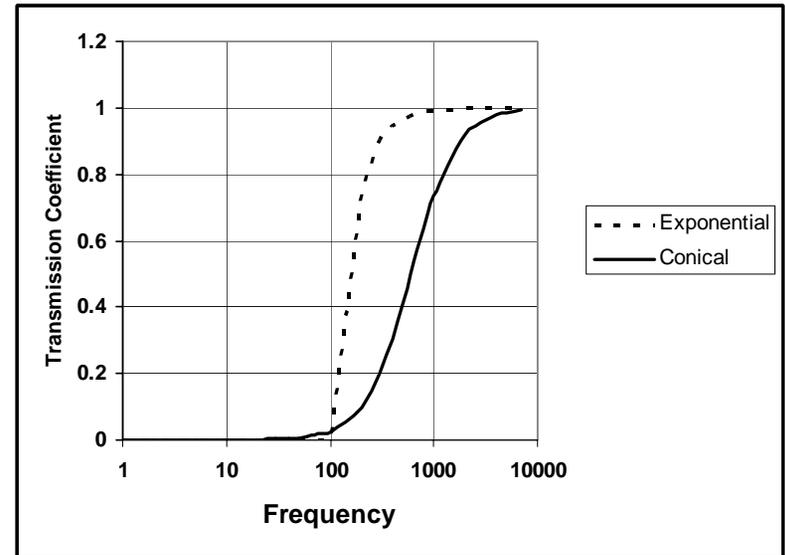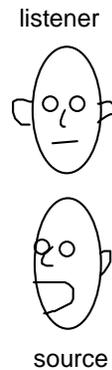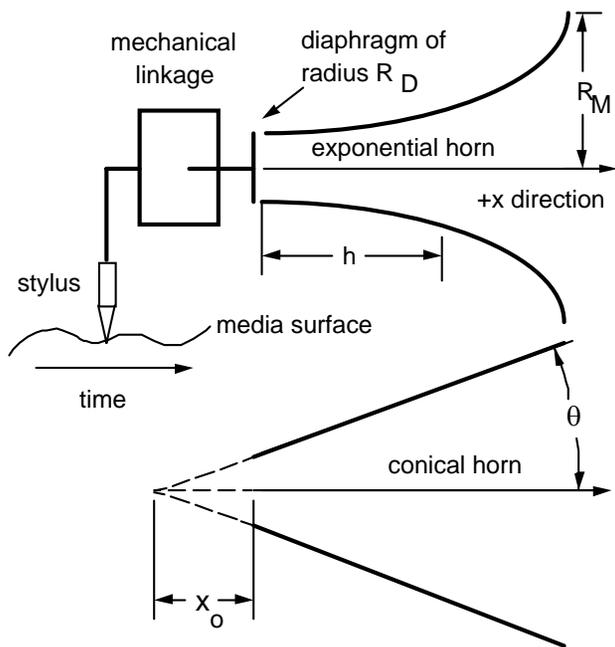

Response of horn and diaphragm at low frequency can modify response and deviations from “constant velocity” characteristic.




U.S. DEPARTMENT OF THE INTERIOR, NATIONAL PARK SERVICE, EDISON NATIONAL HISTORIC SITE

# Damaged or Delicate Cylinders


- Optical restoration of commercial cylinders yields satisfactory results
- Historical value of recorded wax cylinders is greater
  - Earlier recordings
  - Field work
  - Dictation
- Fungus growth and other surface issues can seriously degrade these
- A research priority for the Library of Congress

# Surface Damage = Sound Degradation

Clean Area

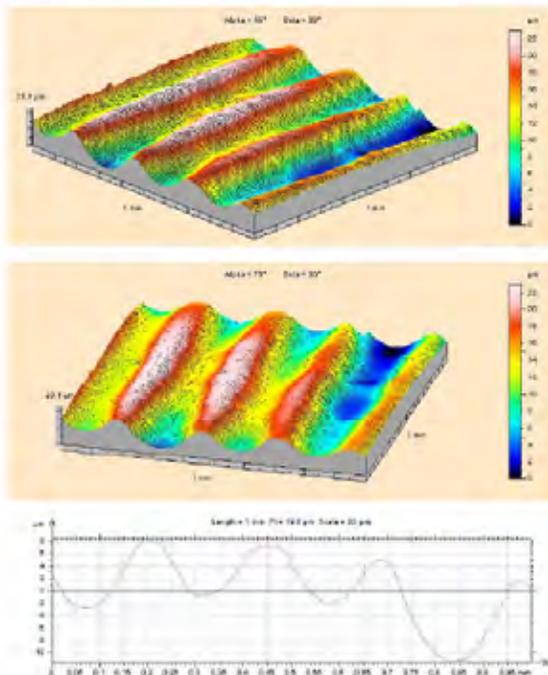

Brown Area

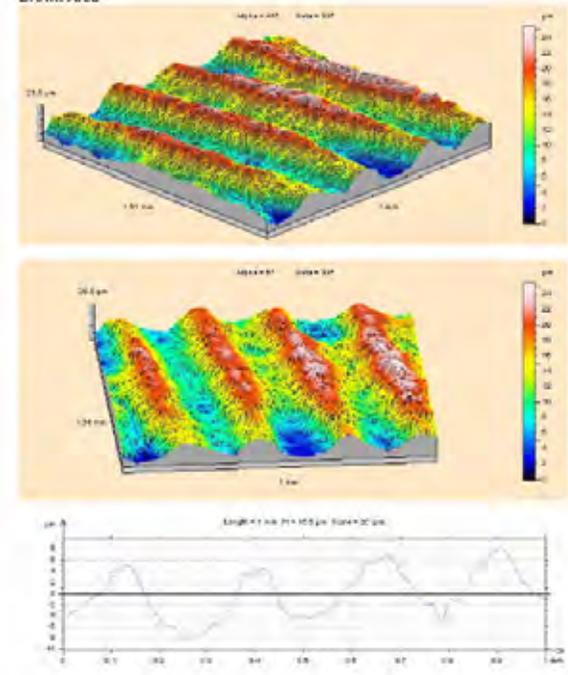

# Ethnographic Recordings



Oct. 8, 2006



AES SF 2006  
Carl Haber


57

Ishi, regarded as the last survivor of the Yahi tribe of No. California was recorded extensively by UC Berkeley Anthropologist Alfred Kroeber (circa 1915). This collection is held at the UCB Phoebe Hearst Museum.



Sam Batwai, Alfred L. Kroeber, and Ishi  
Oct. 8, 2006

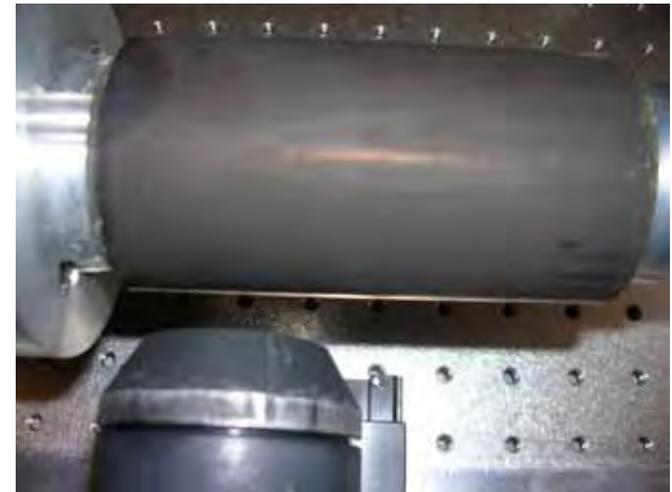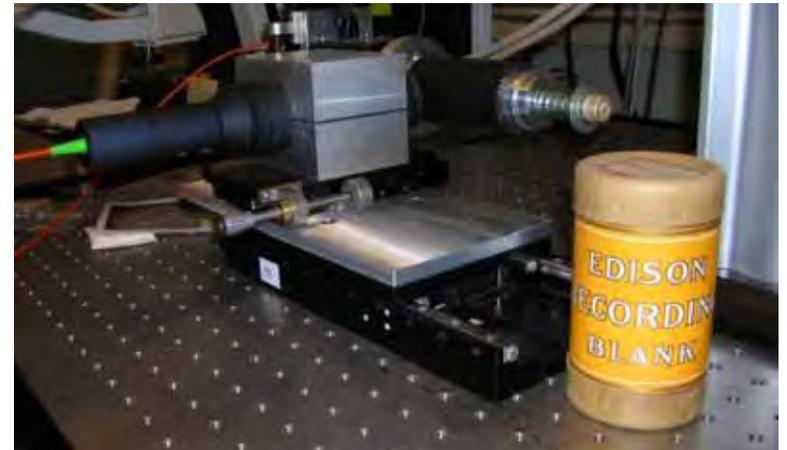



Ishi at Deer Creek

# London Wax Cylinders




Jack and Charmian London



JL's Dictaphone machines  
from the JL State Park



1st cylinder from JL house  
with mold growth visible

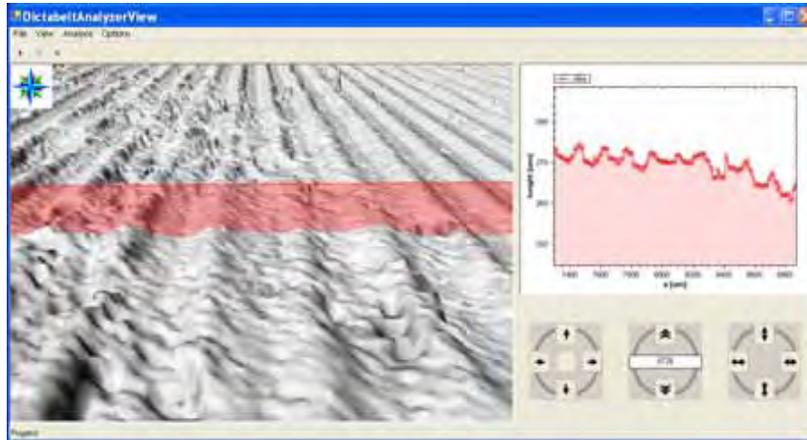


Oct. 8, 2006

AES SF 2006  
Carl Haber



1st Cylinder on 3D scanner

# Audio Extraction



..soon after the affair, very tragically between England and America...

...the Lusitania...

I wish I had time to go and read your letters.....that it opens up...but I simply cannot....After the war is over I am intent upon going to England. And then making sure that we shall get together (period)



..soon after the affair, very tragically between England and America...  
...the Lusitania...  
I wish I had time to go and read your letters.....that it opens up...but I simply cannot....After the war is over I am intent upon going to England. And then making sure that we shall get together (period)

Voice of Charmian London 1915?

# Dictation Belt Scanning

- Plastic dictation belts are historical documents
  - LBJ, JFK presidential phone conversations
  - Dallas PD recording of open mic 11/22/63 (NARA)
- Some belts are worn and cracked
  - NARA proposed a high resolution optical scan as a way to make a digital preservation copy and enable access.
- Scanning tests and analyses have been performed on recorded test belts and other samples.
- Recorded at 42 rpm: long scan times




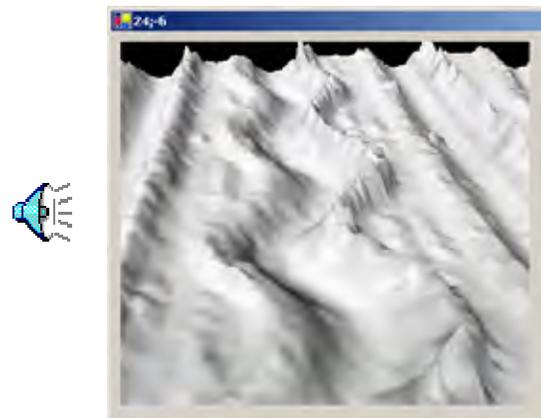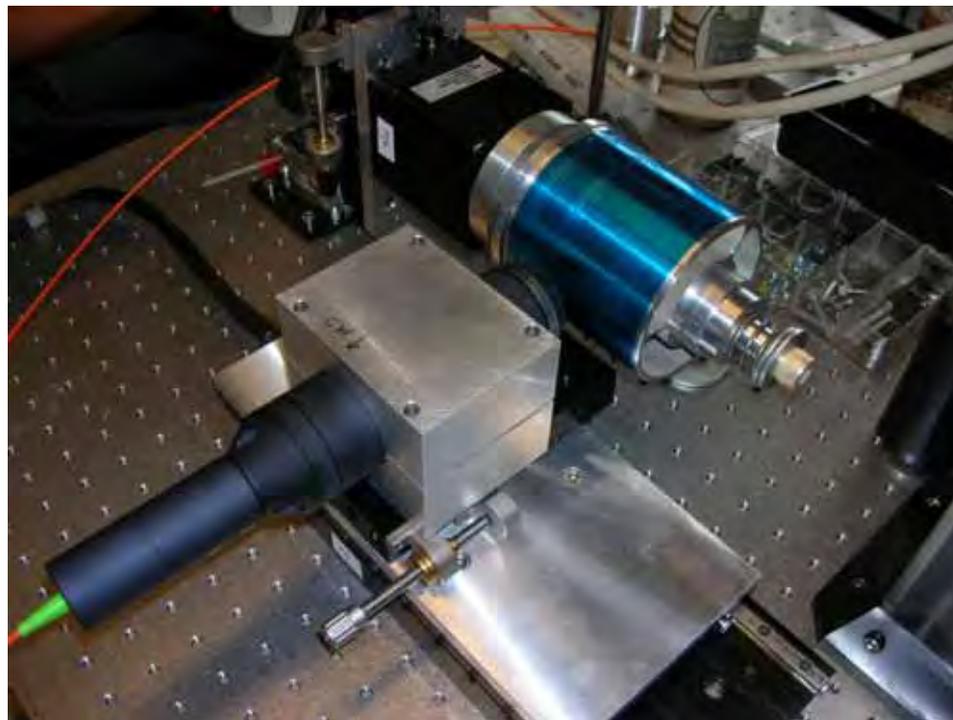


Oct. 8, 2006


AES SF 2006  
Carl Haber

# Display of Tone Test Belt

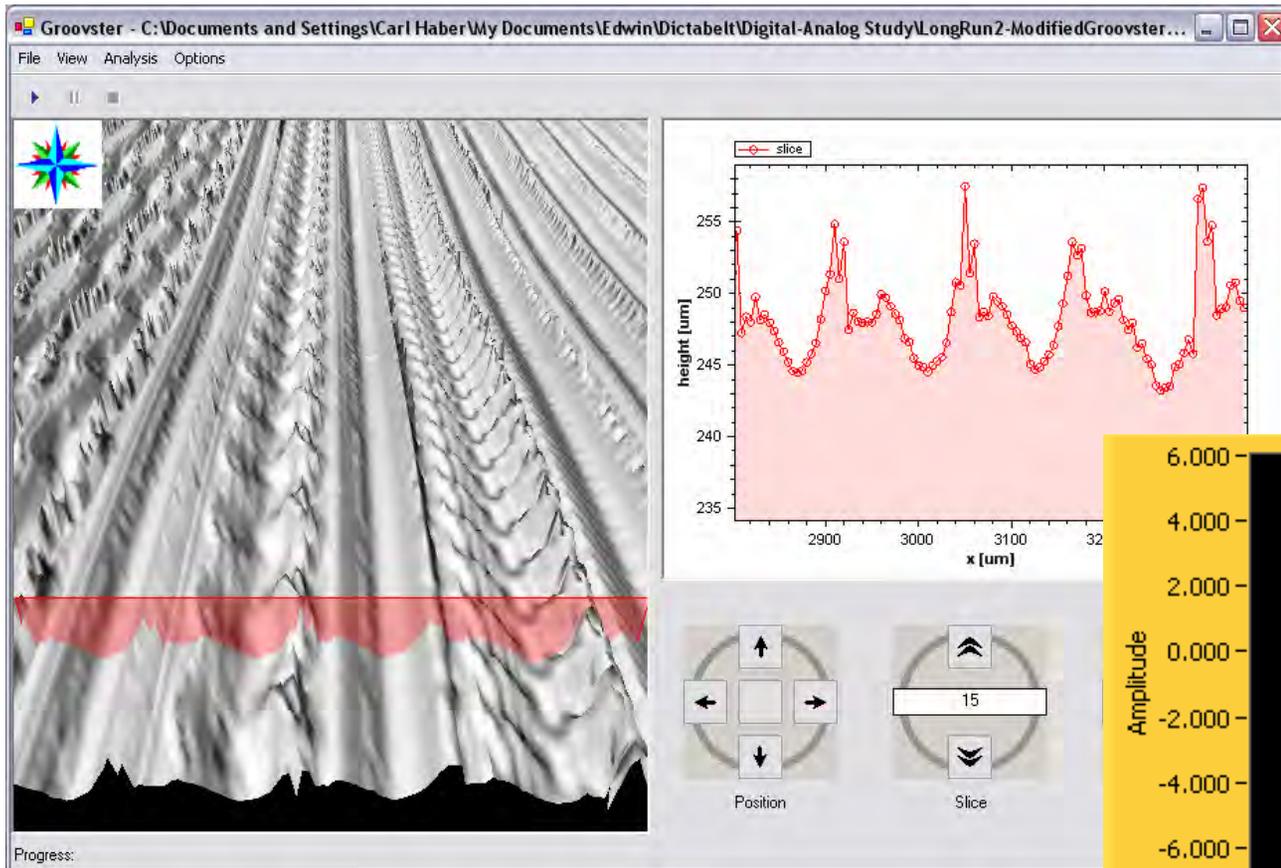


Note complex groove profile





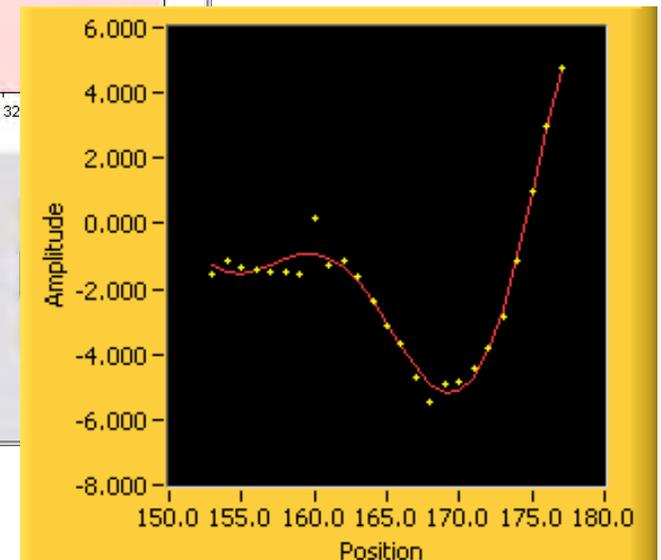


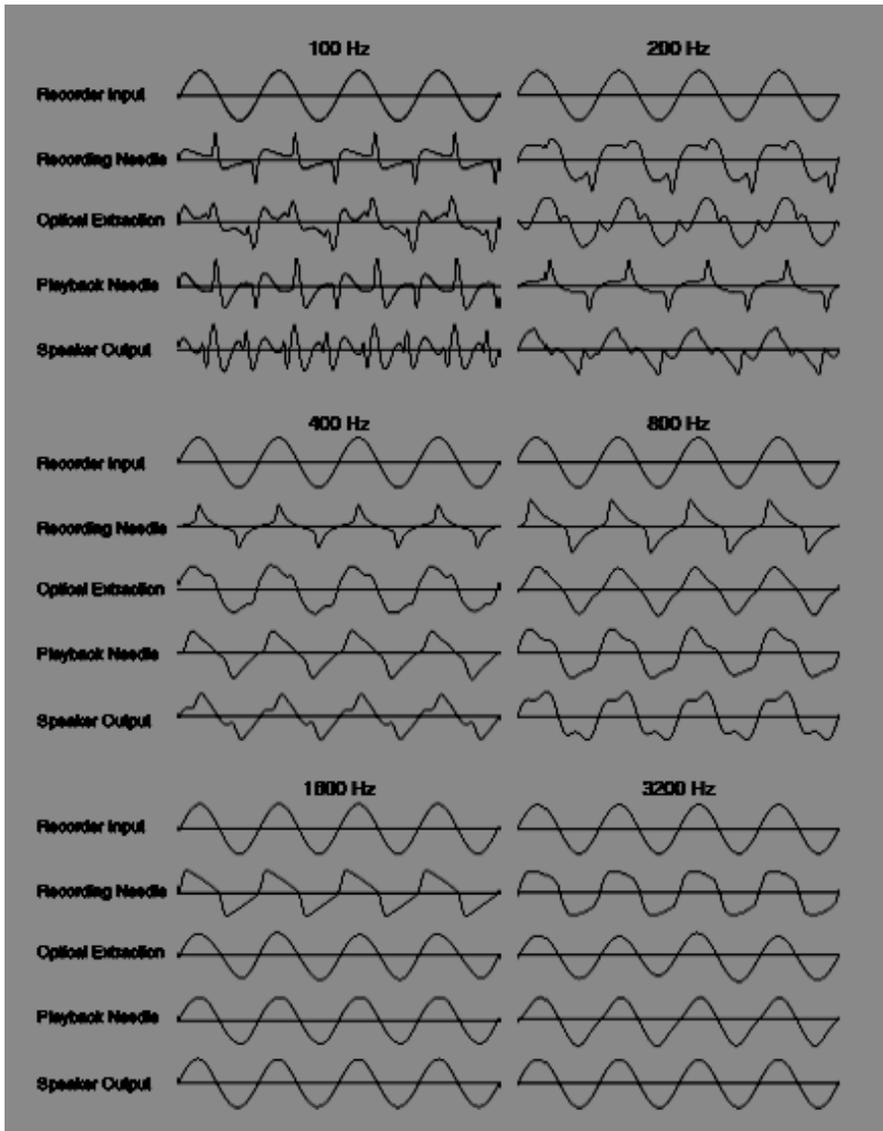

- Considerable non-linearity of the system.
- Bears on validation of process
- Bears on analytical applications

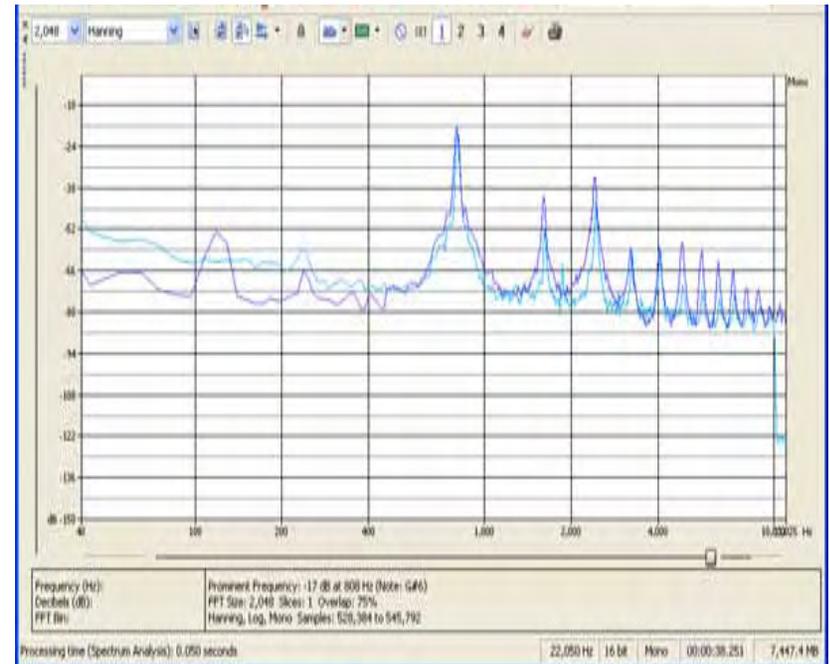

# Optical Scanning: A general tool to preserve and create access to recorded sound history

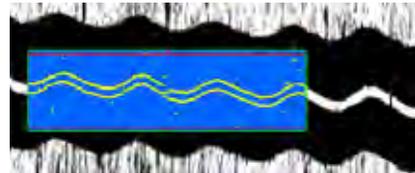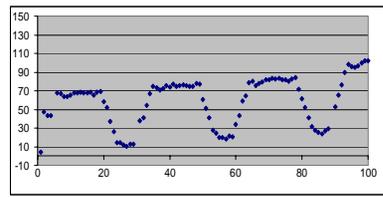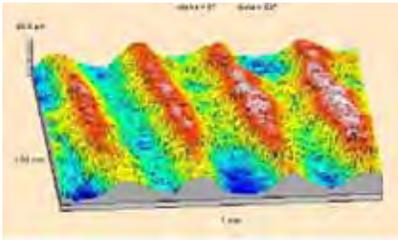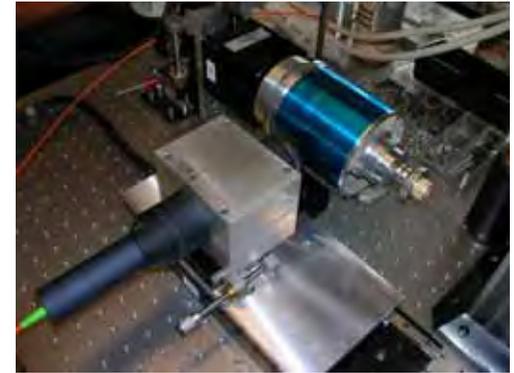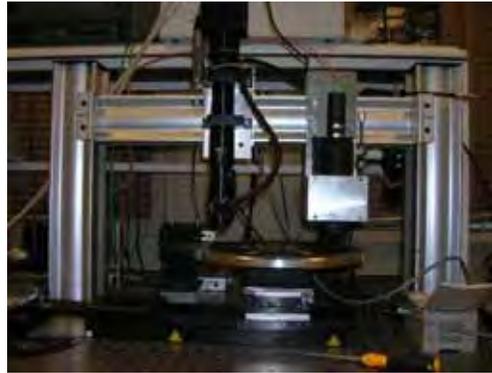

Wax cylinder

Shellac disc

Plastic dictation belt

Web site URL: [www-cdf.lbl.gov/~av](http://www-cdf.lbl.gov/~av)

V. Fadeyev and C. Haber **J. Audio Eng. Soc.**, vol. 51, no. 12, pp. 1172-1185 (2003 Dec.)

V. Fadeyev et al, **J. Audio Eng. Soc.**, vol. 53, no.6, pp.485-508 (2005 June).